


AB 152 - AB 212 - AB 282 - AB 352 - AB 502 AB 852 - AB 1052 - AB 1352 - AB 1852 AB 2452 - AB 2852 - AB 3552 - AB 4052

Breakers

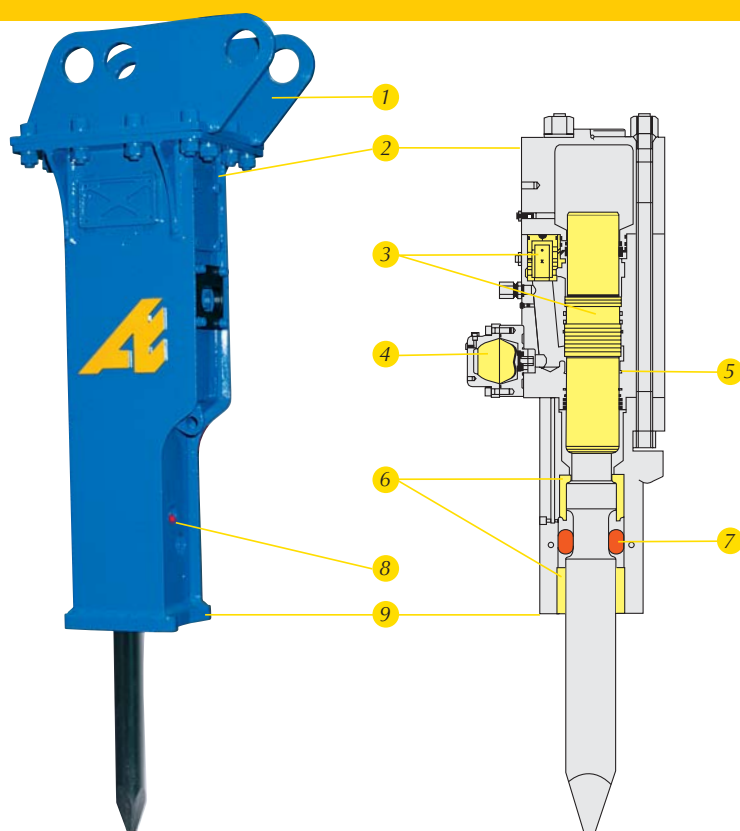


- 1 Top Plate for bolt on bracket.
- 2 Silenced absorbers.
- 3 Only 2 moving components : control valve and piston therefore low maintenance.
- 4 Nitrogen energy chamber absorbing vibrations.
- 5 Idle stroke protection.
- 6 Twin bushes chisel guide.
- 7 Quick change retaining pins.
- 8 Easy greasing system.
- 9 Reinforced lower part of body.

Option :

Centralized self-acting grease lubrication kit for AB1352 to AB4052.

Moil point chisel



Flat horizontal



Blunt chisel



(For AB2452 to AB4052)

Spade chisel



(For AB152 to AB502)



		≈ kg	Litres/min	bar	bar	Nb/min	joule	mm	t	t
AB 152	-	145	20/30	90/110	180	700/900	343	57	1,3/3	-
AB 212	-	180	26/40	90/120	180	600/800	392	57	2,5/4,5	-
AB 282	X	250	25/45	90/120	180	700/800	696	70	3/6	4/7
AB 352	X	310	35/55	110/165	220	550/700	736	70	4/8	5/10
AB 502	X	480	40/60	140/165	220	500/700	1177	80	6 /10	6/12
AB 852	X	740	75/85	140/165	300	450/550	2158	95	10/14	-
AB 1052	X	960	80/100	140/170	300	450/550	2518	105	12/18	-
AB 1352	X	1360	110/125	160/180	300	400/480	3880	125	16/24	-
AB 1852	X	1800	110/140	160/180	300	370/450	5350	135	22/30	-
AB 2452	X	2450	150/200	160/180	300	280/350	8750	150	25/36	-
AB 2852	X	2850	190/220	160/180	300	280/330	10897	155	28/42	-
AB 3552	X	3550	200/230	160/180	300	280/330	12250	165	34/50	-
AB 4052	X	4000	230/270	160/180	300	270/320	15240	175	40/60	-

Weight without top plate.