


- 1) Male suspension link
- 2) Continuous 360°hydraulic rotation (Slewing ring/motor)
- 3) 2 protected cylinders
- 4) Body in high tensile steel
- 5) HF treated pins
- 6) Shells in wear resistant steel.
- 7) Synchronized shells on PB453 to PB603



Upper structure	Kg Without Suspension Link	t	Liters/min	bar	Liters/min	bar	t	Crossing shells
PB453R101	350	10	10/15	140	55/115	320	13 / 22	Yes
PB553R151	415	15	15/20	140	55/115	320	23 / 30	Yes
PB603R201	580	20	15/20	140	50/120	350	27 / 40	Yes
PB703R251	1070	25	20/25	140	150/200	350	30 / 42	No
PB703R251	1070	25	20/25	140	150/200	350	39 / 50	No

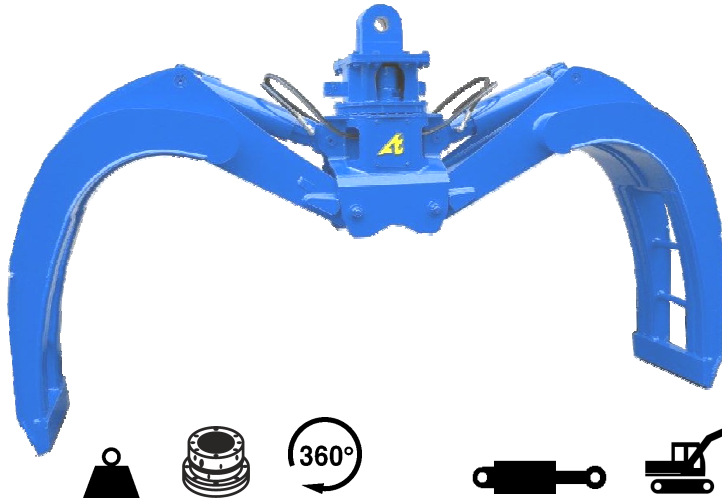

A B C D E F G H I J K L M O S1 S2 S3

Grabs	Kg	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	dm ²	dm ²	dm ²
JPB453C075	590	1585	680	2180	2445	2100	1185	975	1660	100	1910	250	1365	670	440	140	75	12
JPB453C100	630	1710	800	2470	2735	2285	1380	1090	1670	100	2060	265	1615	670	440	190	100	14
JPB553C130	1010	1990	1070	2312	2656	2380	1470	1237	1800	0	1975	220	2210	900	580	240	125	10
JPB603C160	1050	2134	1020	2650	2990	2665	1550	1510	1970	0	2340	410	2100	900	600	300	155	27
JPB603C200	1280	2290	1175	3020	3372	2905	1790	1665	2115	0	2530	435	2405	900	600	390	200	30
JPB603C250	1435	2410	1300	3310	3715	3070	1955	1910	2380	0	2700	525	2650	900	600	480	250	45
JPB703J300	2080	2136	950	3800	4227	3104	1876	2092	2788	0	-	-	-	870	870	360	310	-
JPB703J350	1970	2385	1115	4126	4435	3365	2065	2274	3040	0	-	-	-	880	880	465	330	-

