



2024 BLTB-3 SERIE Hydraulische Hammer Hydraulic Breaker

Member of



**Leichte Hammer
Light Breakers**

- für 0,8 - 11 t Bagger
- for 0,8 - 11 t Excavators



**Mittlere Hammer
Medium Breakers**

- für 10 - 36 t Bagger
- for 10 - 36 t Excavators



**Schwere Hammer
Heavy Breakers**

- für 38 - 160 t Bagger
- for 38 - 160 t Excavators



**Kopfplatten
Breakets**

- 30 Modelle/ Models
- MS/ CW/ SW/



**Mitgeliefertes Zubehör
Supplied equipment**



BLTB-40-3 - BLTB-100A-3

0,8 - 16t Hydraulikhammer | 0,8 - 16t Hydraulic Hammer

BLTB -100A-3

BLTB -85-3

BLTB -75-3


BLTB -70-3

BLTB -60-3

BLTB -53-3

BLTB -45-3


BLTB -40-3

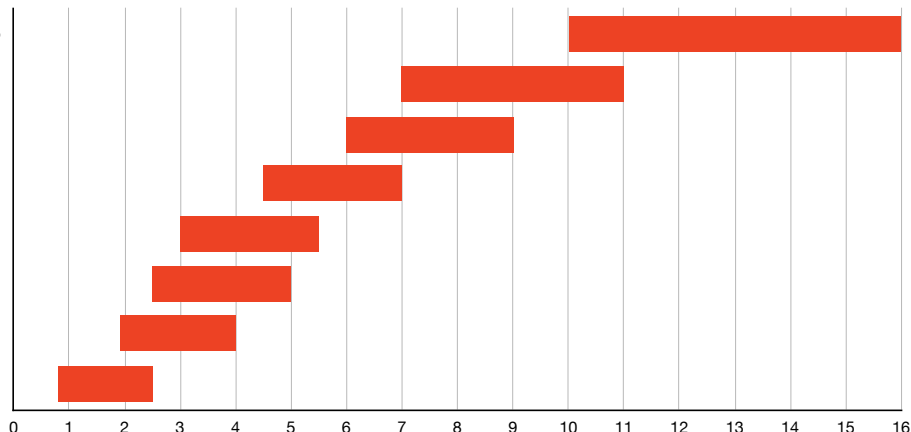

Baggerdienstgewicht/ Applicable Excavator Weight in t

Deutsch English			BLTB 40-3	BLTB 45-3	BLTB 53-3	BLTB 60-3	BLTB 70-3	BLTB 75-3	BLTB 85-3	BLTB 100A-3
GESAMTGEWICHT WORKING WEIGHT	kg		86	137	180	263	362	466	666	986
	lb		190	302	397	580	798	1027	1468	2174
GESAMTLÄNGE TOTAL LENGTH	mm		973	1093	1196	1223	1402	1588	1839	2061
	inch		43,9	50,4	56,9	58,2	65,0	73,3	84,3	90,9
ÖLFLUSS WORKING OIL FLOW	l/min		15~30	20~40	20~50	30~60	40~70	50~90	60~100	80~110
	gal/min		4~7.9	5.3~10.6	5.3~13.2	10.6~18.5	10.6~18.5	13.2~23.8	15.9~26.4	21.1~29.1
BAGGER-EINSTELLDRUCK SET PRESSURE EXCAVATOR	bar		130	140	150	160	160	180	180	210
	psi		1885	2031	2176	2321	2321	2611	2611	3046
BETRIEBSDRUCK OPERATING PRESSURE	bar		90~120	90~120	90~120	100~130	110~140	120~150	130~160	150~170
	psi		1305~1740	1305~1740	1305~1740	1595~2031	1595~2031	1740~2176	1885~2321	2176~2466
SCHLAGFREQUENZ IMPACT RATE	bpm		800~1400	700~1200	600~1100	500~1000	500~900	400~800	400~800	350~700
WERKZEUGDURCHMESSER CHISEL DIAMETER	mm		40	45	53	60	70	75	85	100
	inch		1,6	1,8	2,1	2,4	2,8	3,0	3,3	3,9
WERKZEUGLÄNGE CHISEL LENGTH	mm		450	500	580	600	700	750	850	1000
	inch		17,7	19,7	22,8	23,6	27,6	29,5	33,5	39,4
SCHLAUCHANSCHLUSS HOSE DIAMETER	inch		1/2	1/2	1/2	1/2	1/2	1/2	3/4	3/4
KOLBENSPEICHERDRUCK N2 PRESSURE (BACK HEAD)	bar		14~17	14~17	14~17	14~17	14~17	14~17	14~17	14~17
	psi		203~247	203~247	203~247	203~247	203~247	203~247	203~247	203~247
AKKUMULATORDRUCK N2 PRESSURE (ACCUMULATOR)	bar		/	/	/	/	/	/	/	55~60
	psi		/	/	/	/	/	/	/	798~870
SCHALL 85DB(A)-ENTFERNUNG NOISE 85DB(A)-DISTANCE	m		2~5	3~6	4~8	5~10	5~10	6~12	6~12	7~14
BAGGERGRÖSSE APPLICABLE EXCAVATOR	t		0.8~2.5	1.9~4	2.5~5	3~5.5	4.5~7	6~9	7~11	10~16
LOCHBILD HOLE PATTERN	AC		AC-02	AC-02	AC-03	AC-05	AC-05	AC-06	AC-08	AC-09


B-BLTB-1-2024

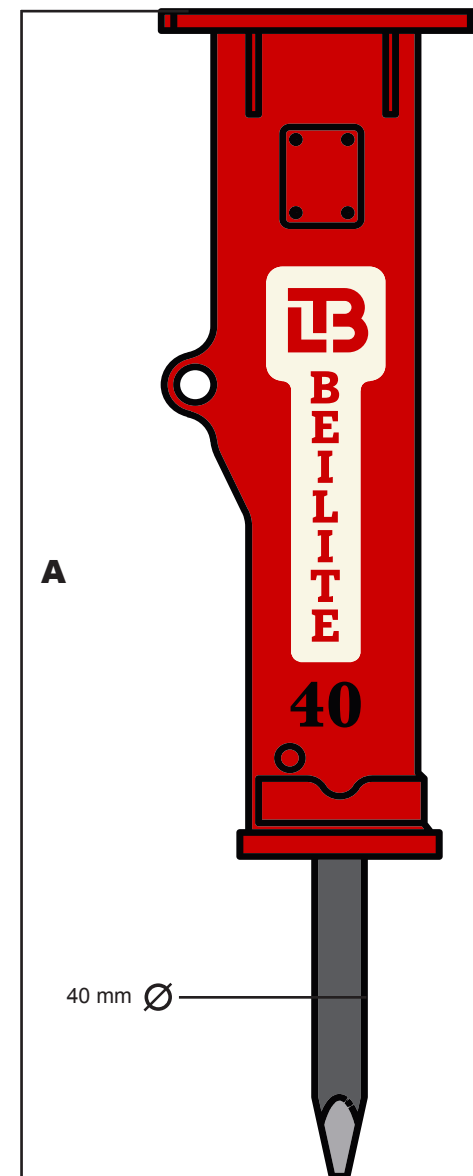




BLTB-125A-3 - BLTB-175L-3

14 - 50t Hydraulikhammer | 14 - 15t Hydraulic Hammer

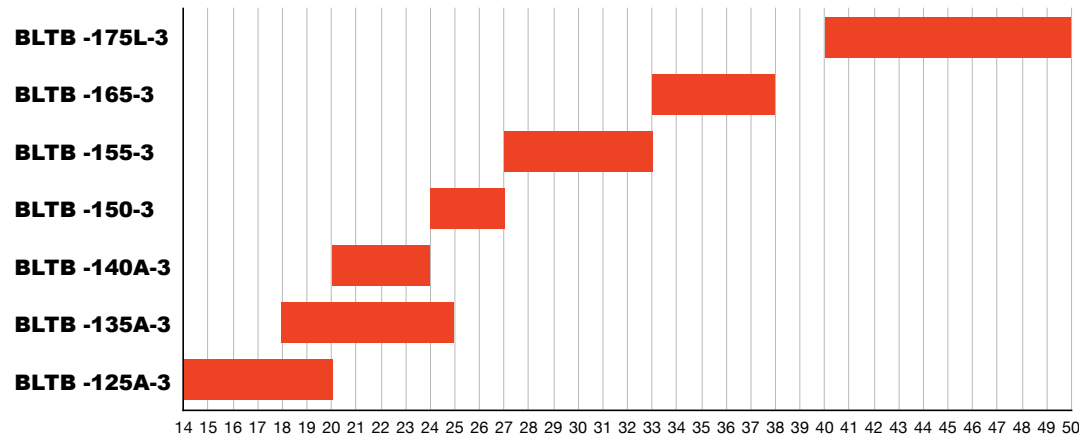


Baggerdienstgewicht/ Applicable Excavator Weight in t

Deutsch English			BLTB 125A-3	BLTB 135A-3	BLTB 140A-3	BLTB 150-3	BLTB 155-3	BLTB 165-3	BLTB 175L-3
GESAMTGEWICHT WORKING WEIGHT	kg		1357	1736	1910	2318	2610	3149	4575
	lb		2992	3827	4211	5110	5754	6942	10086
GESAMTLÄNGE TOTAL LENGTH	mm		2267	2312	2402	2671	2742	2929	3238
	inch		102,7	106,5	109,7	123,1	124,4	132,6	145,0
ÖLFLUSS WORKING OIL FLOW	l/min		90~120	120~180	120~180	150~210	180~240	200~260	220~270
	gal/min		23.8~31.7	31.7~47.6	31.7~47.6	39.6~55.5	47.6~63.4	52.8~68.7	58.1~71.3
BAGGER-EINSTELLDRUCK SET PRESSURE EXCAVATOR	bar		210	210	210	230	250	260	280
	psi		3046	3046	3046	3336	3626	3771	4061
BETRIEBSDRUCK OPERATING PRESSURE	bar		150~170	160~180	160~180	180~200	200~220	210~230	230~250
	psi		2176~2466	2321~2611	2321~2611	2611~2901	2901~3191	2901~3191	2901~3336
SCHLAGFREQUENZ IMPACT RATE	bpm		350~650	350~500	350~500	200~300	200~300	150~300	130~200
WERKZEUGDURCHMESSER CHISEL DIAMETER	mm		125	135	140	150	155	165	175
	inch		4,9	5,3	5,5	5,9	6,1	6,5	6,9
WERKZEUGLÄNGE CHISEL LENGTH	mm		1100	1200	1250	1400	1400	1450	1500
	inch		43,3	47,2	49,2	55,1	55,1	57,1	59,1
SCHLAUCHANSCHLUSS HOSE DIAMETER	inch		1	1	1	1	1 1/4	1 1/4	1 1/4
KOLBENSPEICHERDRUCK N2 PRESSURE (BACK HEAD)	bar		14~17	14~17	14~17	17~20	17~20	18~22	25~28
	psi		203~247	203~247	203~247	247~290	247~290	261~319	363~406
AKKUMULATORDRUCK N2 PRESSURE (ACCUMULATOR)	bar		55~60	55~60	55~60	55~60	55~60	55~60	55~60
	psi		798~870	798~870	798~870	798~870	798~870	798~870	798~870
SCHALL 85DB(A)-ENTFERNUNG NOISE 85DB(A)-DISTANCE	m		10~18	16~22	16~22	21~30	26~35	35~40	38~45
BAGGERGRÖSSE APPLICABLE EXCAVATOR	t		14~20	18~25	21~29	24~32	27~36	33~42	40~50
LOCHBILD HOLE PATTERN	AC		AC-09	AC-09	AC-09	AC-10	AC-10	AC-11	AC-11

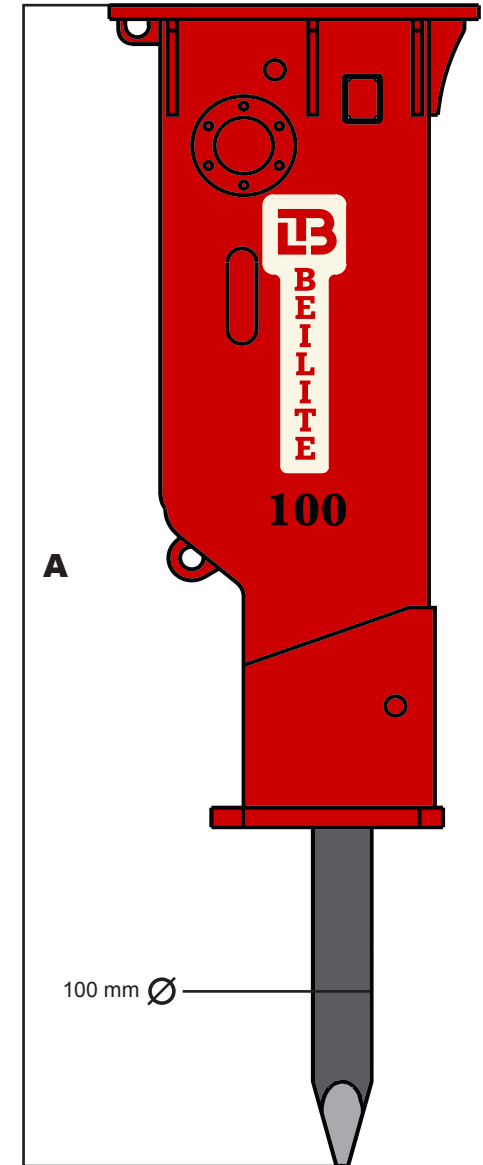




BLTB-190-3-W - BLTB-260-3-W
45 - 200t Hydraulikhammer | 45 - 200t Hydraulic Hammer

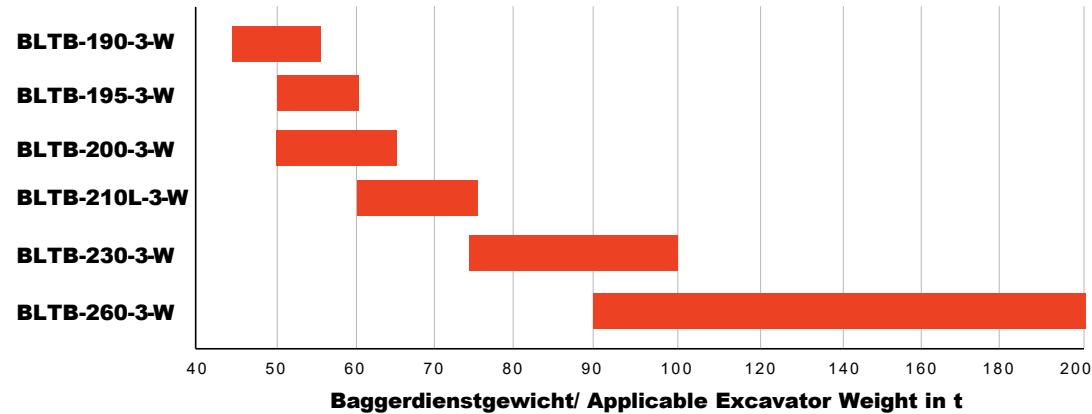



Deutsch English			BLTB 190-3-W	BLTB 195-3-W	BLTB 200-3-W	BLTB 210L-3-W	BLTB 230-3-W	BLTB 260-3-W
GESAMTGEWICHT WORKING WEIGHT	kg		4700	4900	5200	7000	13000	16000
	lb		10361	10802	11464	15432	28660	35274
GESAMTLÄNGE TOTAL LENGTH	mm		3334	3454	3555	3850	4276	4576
	inch		131.3	136	140	151.6	168.3	180.2
ÖLFLUSS WORKING OIL FLOW	l/min		240~290	260~310	280~330	340~400	400~460	490~590
	gal/min		63.4~76.6	68.7~81.9	73.9~87.2	89.8~105.7	105.7~121.5	129.4~155.8
BAGGER-EINSTELLDRUCK SET PRESSURE EXCAVATOR	bar		300	310	330	330	350	350
	psi		4351	4496	4786	4786	5076	5076
BETRIEBSDRUCK OPERATING PRESSURE	bar		250~270	260~280	280~300	280~300	300~330	300~330
	psi		3626~3916	3771~4061	4061~4351	4061~4351	4351~4786	4351~4786
SCHLAGFREQUENZ IMPACT RATE	bpm		100~140	100~140	100~130	90~120	80~110	70~100
WERKZEUGDURCHMESSER CHISEL DIAMETER	mm		190	195	200	210	230	260
	inch		7.5	7.7	7.9	8.3	9.1	10.2
WERKZEUGLÄNGE CHISEL LENGTH	mm		1600	1600	1620	1800	2000	2200
	inch		62	62	63.8	70.9	78.7	86.6
SCHLAUCHANSCHLUSS HOSE DIAMETER	inch		1 1/4	1 1/4	1 1/4	1 1/2	1 1/2	1 1/2
KOLBENSPEICHERDRUCK N2 PRESSURE (BACK HEAD)	bar		27-30	30-33	27-30	32-35	30-33	32-35
	psi		391.6~435.1	435.1~478.6	391.6~435.1	464.1~507.6	435.1~478.6	464.1~507.6
AKKUMULATORDRUCK N2 PRESSURE (ACCUMULATOR)	bar		65-70	65-70	65-70	75-80	75-80	75-80
	psi		942.7~1015.3	942.7~1015.3	942.7~1015.3	1087.8~1160.3	1087.8~1160.3	1087.8~1160.3
SCHALL 85DB(A)-ENTFERNUNG NOISE 85DB(A)-DISTANCE	m		45~50	48~52	50~55	50~55	60~65	80~85
BAGGERGRÖSSE APPLICABLE EXCAVATOR	t		45~55	50~60	50~65	60~75	75~100	90~200
LOCHBILD HOLE PATTERN	AC		AC-13	AC-13	AC-13	AC-14	AC-15	AC-15

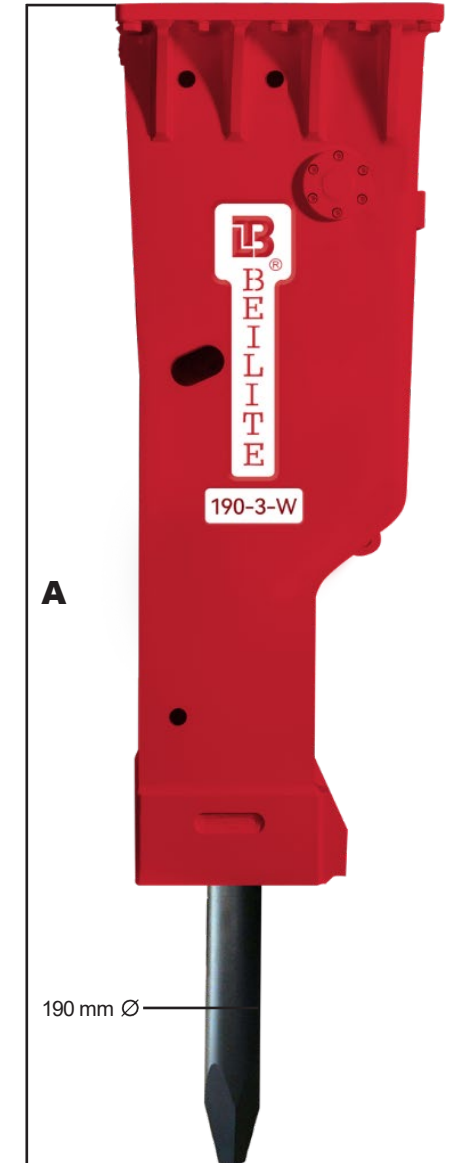



BLTB-40-3

HYDRAULIKHAMMER | HYDRAULISCHE HAMER
MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

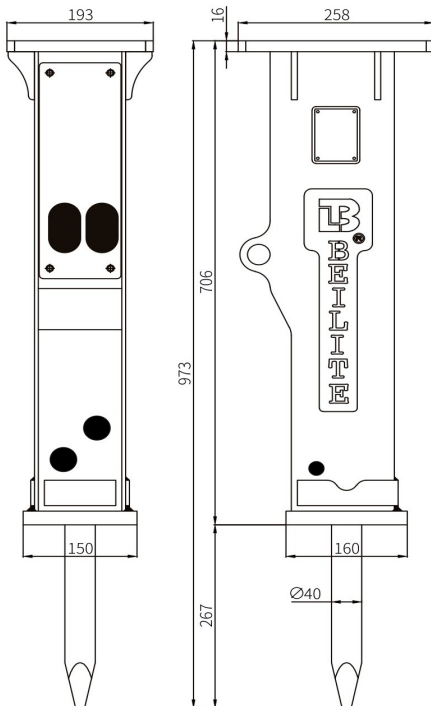

Deutsch | Nederlands | Français | Englisch

GESAMTGEWICHT | WERKGEWICHT | POIS EN ORDRE DE MARCHÉ | WORKING WEIGHT

kg 86

lb 190

GESAMTLÄNGE | LENGTE | LONGUEUR TOTALE | TOTAL LENGTH

mm 973

inch 43,9

ÖLFLUSS | OLIESTROOM | DÉBIT D'HUILE | WORKING OIL FLOW

l/min 15~30

gal/min 4~7,9

BAGGER-EINSTELLDROCK | STEL DRUK GRAAFMACHINE | PRESSION DE RÉGLAGE DE L'EXCAVATEUR | SET PRESSURE EXCAVATOR

bar 130

psi 1885

BETRIEBSDRUCK | WERKDRUK | PRESSION DE FONCTIONNEMENT | OPERATING PRESSURE

bar 90~120

psi 1305~1740

SCHLAGFREQUENZ | SLAGFREQUENTIE | FRÉQUENCE D'IMPACT | IMPACT RATE

bpm 800~1400

WERKZEUGDURCHMESSER | BEITEL DIAMETER | DIAMÈTRE DU BURIN | CHISEL DIAMETER

mm 40

inch 1,6

WERKZEUGLÄNGE | BEITEL LENGTE | LONGUEUR DU BURIN | CHISEL LENGTH

mm 450

inch 17,7

SCHLAUCHANSCHLUSS | SLANG AANSLUITING | DIAMÈTRE DU TUYAU | HOSE DIAMETER

inch 1/2

KOLBENSPEICHERDRUCK | ZUIGERACCUMULATOR DRUCK | PRESSION ACCUMULATEUR PISTON | N2 PRESSURE (BACK HEAD)

bar 14-17

psi 203-247

AKKUMULATORDRUCK | ACCUMULATOR DRUCK | PRESSION ACCUMULATEUR | N2 PRESSURE (ACCUMULATOR)

bar /

psi /

SCHALL 85DB(A)-ENTFERNUNG | GELUID 85DB(A)-AFSTAND | BRUIT 85DB(A)-DISTANCE | NOISE 85DB(A)-DISTANCE

m 2-5

BAGGERGRÖSSE | GRAAFMACHINE KLASSE | EXCAVATRICE APPLICABLE | APPLICABLE EXCAVATOR

t 0.8-2.5

LOCHBILD | HOLE PATTERN | GATEN PATROON | MOTIF DE TROU

AC AC-02



BEILITE®EUROPE B.V.

| Rijkssstraatweg 4, NL-4197BC Buurmalsen |

| Tel: +31 316 267291 |

| Info@beilite-europe.com |

| www.beilite-europe.com |

COPYRIGHT 2024

BEILITE®EUROPE B.V.

ALL RIGHTS RESERVED




Subject to errors and changes
Our general terms and conditions apply, published at
www.beilite-europe.com



BLTB-45-3

HYDRAULIKHAMMER | HYDRAULISCHE HAMER
MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

B-BLTB-45-3-2-2024

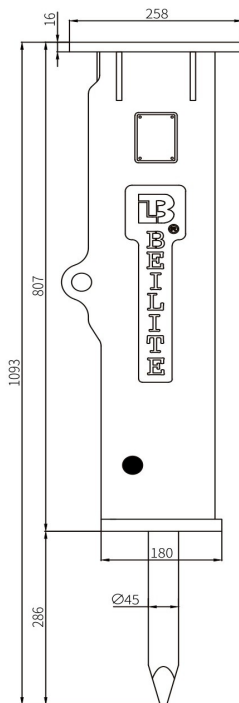

Deutsch | Nederlands | Français | English

	kg	137
GESAMTGEWICHT WERKGEWICHT POIS EN ORDRE DE MARCHÉ WORKING WEIGHT	lb	302
	mm	1093
GESAMTLÄNGE LENGTE LONGUEUR TOTALE TOTAL LENGTH	inch	50,4
	l/min	20~40
ÖLFLUSS OLIESTROOM DÉBIT D'HUILE WORKING OIL FLOW	gal/min	5.3~10.6
BAGGER-EINSTELLDRIJK STEL DRUK GRAAFMACHINE PRESSIÖN DE RÉGLAGE DE L'EXCAVATEUR SET PRESSURE EXCAVATOR	bar	140
	psi	2031
BETRIEBSDRUK WERKDRUK PRESSIÖN DE FONCTIONNEMENT OPERATING PRESSURE	bar	90~120
	psi	1305~1740
SCHLAGFREQUENZ SLAGFREQUENTIE FRÉQUENZ D'IMPACT IMPACT RATE	bpm	700~1200
WERKZEUGDURCHMESSER BEITEL DIAMETER DIAMÈTRE DU BURIN CHISEL DIAMETER	mm	45
	inch	1,8
WERKZEUGLÄNGE BEITEL LENGTE LONGUEUR DU BURIN CHISEL LENGTH	mm	500
	inch	19,7
SCHLAUCHANSCHLUSS SLANG AANSLUITING DIAMÈTRE DU TUYAU HOSE DIAMETER	inch	½
KOLBENSPEICHERDRUK ZUIGERACCUMULATOR DRUK PRESSIÖN ACCUMULATEUR PISTON N2 PRESSURE (BACK HEAD)	bar	14-17
	psi	203-247
AKKUMULATORDRUK ACCUMULATOR DRUK PRESSIÖN ACCUMULATEUR N2 PRESSURE (ACCUMULATOR)	bar	/
	psi	/
SCHALL 85DB(A)-ENTFERNUNG GELUID 85DB(A)-AFSTAND BRUIT 85DB(A)-DISTANCE NOISE 85DB(A)-DISTANCE	m	3-6
BAGGERGRÖSSE GRAAFMACHINE KLASSE EXCAVATRICE APPLICABLE APPLICABLE EXCAVATOR	t	1.9~4
LOCHBILD HOLE PATTERN GATEN PATROON MOTIF DE TROU	AC	AC-02



BEILITE®EUROPE B.V.

| Rijkssstraatweg 4, NL-4197BC Buurmalsen |

| Tel: +31 316 267291 |

| Info@beilite-europe.com |



| www.beilite-europe.com |

COPYRIGHT 2024

BEILITE®EUROPE B.V.

ALL RIGHTS RESERVED

Subject to errors and changes
Our general terms and conditions apply, published at
www.beilite-europe.com

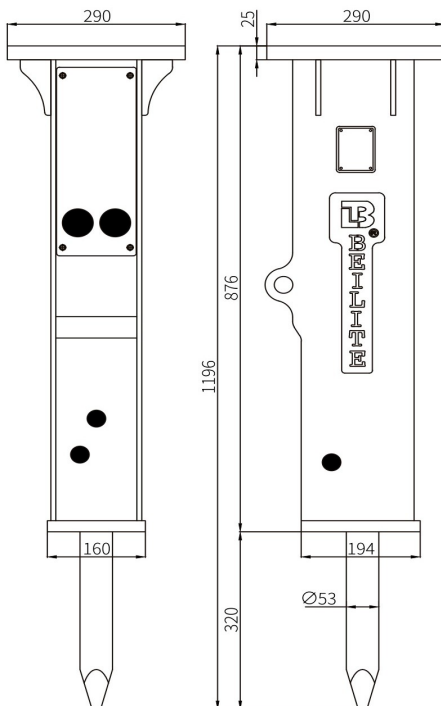

Deutsch | Nederlands | Français | English

GESAMTGEWICHT | WERKGEWICHT | POIS EN ORDRE DE MARCHÉ | WORKING WEIGHT

kg 180

lb 397

GESAMTLÄNGE | LENGTE | LONGUEUR TOTALE | TOTAL LENGTH

mm 1196

inch 56,9

ÖLFLUSS | OLIESTROOM | DÉBIT D'HUILE | WORKING OIL FLOW

l/min 20-50

gal/min 5,3-13,2

BAGGER-EINSTELLDRIJK | STEL DRIJK GRAAFMACHINE | PRESSION DE RÉGLAGE DE L'EXCAVATEUR | SET PRESSURE EXCAVATOR

bar 150

psi 2176

BETRIEBSDRIJK | WERKDRIJK | PRESSION DE FONCTIONNEMENT | OPERATING PRESSURE

bar 90-120

psi 1305-1740

SCHLAGFREQUENZ | SLAGFREQUENTIE | FRÉQUENCE D'IMPACT | IMPACT RATE

bpm 600-1100

WERKZEUGDURCHMESSER | BEITEL DIAMETER | DIAMÈTRE DU BURIN | CHISEL DIAMETER

mm 53

inch 2,1

WERKZEUGLÄNGE | BEITEL LENGTE | LONGUEUR DU BURIN | CHISEL LENGTH

mm 580

inch 22,8

SCHLAUCHANSCHLUSS | SLAG AANSLUITING | DIAMÈTRE DU TUYAU | HOSE DIAMETER

inch ½

KOLBENSPEICHERDRIJK | ZUIGERACCUMULATOR DRIJK | PRESSION ACCUMULATEUR PISTON | N2 PRESSURE (BACK HEAD)

bar 14-17

psi 203-247

AKKUMULATORDRIJK | ACCUMULATOR DRIJK | PRESSION ACCUMULATEUR | N2 PRESSURE (ACCUMULATOR)

bar /

psi /

SCHALL 85DB(A)-ENTFERNUNG | GELUID 85DB(A)-AFSTAND | BRUIT 85DB(A)-DISTANCE | NOISE 85DB(A)-DISTANCE

m 4-8

BAGGERGRÖSSE | GRAAFMACHINE KLASSE | EXCAVATRICE APPLICABLE | APPLICABLE EXCAVATOR

t 2,5-5

LOCHBILD | HOLE PATTERN | GATEN PATROON | MOTIF DE TROU

AC AC-03



BEILITE® EUROPE B.V.

| Rijksweg 4, NL-4197BC Buurmalsen |

| Tel: +31 316 267291 |

| Info@beilite-europe.com |

| www.beilite-europe.com |

COPYRIGHT 2024

BEILITE® EUROPE B.V.

ALL RIGHTS RESERVED




Subject to errors and changes
Our general terms and conditions apply, published at
www.beilite-europe.com



BLTB-60-3

HYDRAULIKHAMMER | HYDRAULISCHE HAMER
MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

B-BLTB-60-3-2-2024

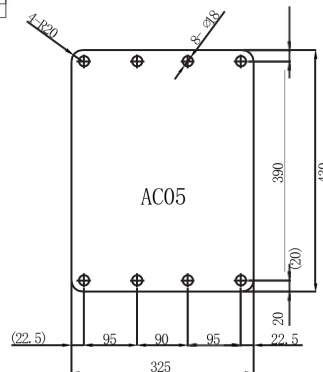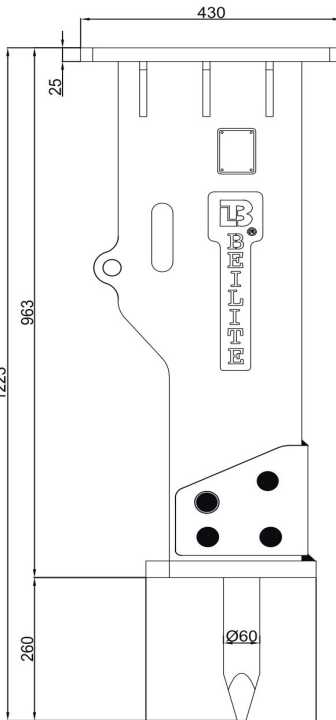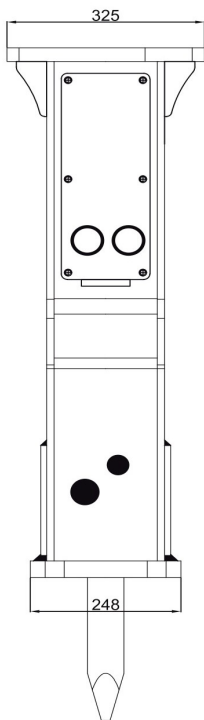

Deutsch | Nederlands | Français | English

GESAMTGEWICHT | WERKGEWICHT | POIS EN ORDRE DE MARCHÉ | WORKING WEIGHT

kg 263

lb 580

GESAMTLÄNGE | LENGTE | LONGUEUR TOTALE | TOTAL LENGTH

mm 1223

inch 58,2

ÖLFLUSS | OLIESTROOM | DÉBIT D'HUILE | WORKING OIL FLOW

l/min 30-60

gal/min 10,6-18,5

BAGGER-EINSTELLDRUCK | STEL DRUK GRAAFMACHINE | PRESSION DE RÉGLAGE DE L'EXCAVATEUR | SET PRESSURE EXCAVATOR

bar 160

psi 2321

BETRIEBSDRUCK | WERKDRUK | PRESSION DE FONCTIONNEMENT | OPERATING PRESSURE

bar 110-140

psi 1595-2031

SCHLAGFREQUENZ | SLAGFREQUENTIE | FRÉQUENCE D'IMPACT | IMPACT RATE

bpm 500-900

WERKZEUGDURCHMESSER | BEITEL DIAMETER | DIAMÈTRE DU BURIN | CHISEL DIAMETER

mm 60

inch 2,4

WERKZEUGLÄNGE | BEITEL LENGTE | LONGUEUR DU BURIN | CHISEL LENGTH

mm 600

inch 23,6

SCHLAUCHANSCHLUSS | SLAG AANSLUITING | DIAMÈTRE DU TUYAU | HOSE DIAMETER

inch 1/2

KOLBENSPEICHERDRUCK | ZUIGERACCUMULATOR DRUCK | PRESSION ACCUMULATEUR PISTON | N2 PRESSURE (BACK HEAD)

bar 14-17

psi 203-247

AKKUMULATORDRUCK | ACCUMULATOR DRUCK | PRESSION ACCUMULATEUR | N2 PRESSURE (ACCUMULATOR)

bar /

psi /

SCHALL 85DB(A)-ENTFERNUNG | GELUID 85DB(A)-AFSTAND | BRUIT 85DB(A)-DISTANCE | NOISE 85DB(A)-DISTANCE

m 5-10

BAGGERGRÖSSE | GRAAFMACHINE KLASSE | EXCAVATRICE APPLICABLE | APPLICABLE EXCAVATOR

t 3-5.5

LOCHBILD | HOLE PATTERN | GATEN PATROON | MOTIF DE TROU

AC AC-05



BEILITE®EUROPE B.V.

| Rijkssstraatweg 4, NL-4197BC Buurmalsen |

| Tel: +31 316 267291 |

| Info@beilite-europe.com |

| www.beilite-europe.com |

COPYRIGHT 2024

BEILITE®EUROPE B.V.

ALL RIGHTS RESERVED



Subject to errors and changes
Our general terms and conditions apply, published at
www.beilite-europe.com



BLTB-70-3

HYDRAULIKHAMMER | HYDRAULISCHE HAMER
MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

B-BLTB-70-3-2-2024

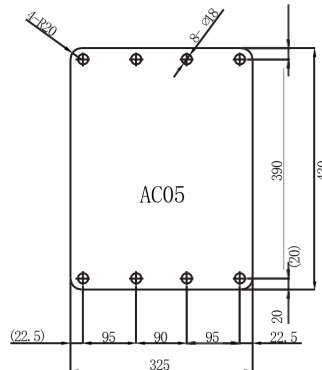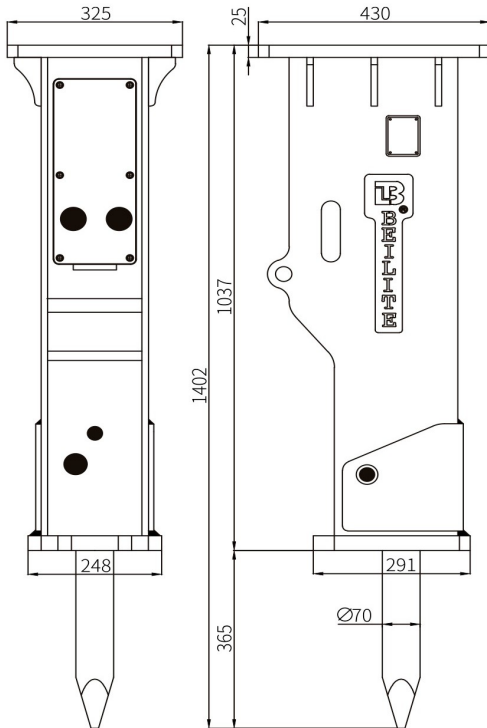

Deutsch | Nederlands | Français | Englisch

GESAMTGEWICHT | WERKGEWICHT | POIS EN ORDRE DE MARCHÉ | WORKING WEIGHT

kg 362

lb 798

GESAMTLÄNGE | LENGTE | LONGUEUR TOTALE | TOTAL LENGTH

mm 1402

inch 65,0

ÖLFLUSS | OLIESTROOM | DÉBIT D'HUILE | WORKING OIL FLOW

l/min 40~70

gal/min 10.6~18.5

BAGGER-EINSTELLDRUCK | STEL DRUK GRAAFMACHINE | PRESSION DE RÉGLAGE DE L'EXCAVATEUR | SET PRESSURE EXCAVATOR

bar 160

psi 2321

BETRIEBSDRUCK | WERKDRUK | PRESSION DE FONCTIONNEMENT | OPERATING PRESSURE

bar 110~140

psi 1595~2031

SCHLAGFREQUENZ | SLAGFREQUENTIE | FRÉQUENCE D'IMPACT | IMPACT RATE

bpm 500~900

WERKZEUGDURCHMESSER | BEITEL DIAMETER | DIAMÈTRE DU BURIN | CHISEL DIAMETER

mm 70

inch 2,8

WERKZEUGLÄNGE | BEITEL LENGTE | LONGUEUR DU BURIN | CHISEL LENGTH

mm 700

inch 27,6

SCHLAUCHANSCHLUSS | SLAG AANSLUITING | DIAMÈTRE DU TUYAU | HOSE DIAMETER

inch 1/2

KOLBENSPEICHERDRUCK | ZUIGERACCUMULATOR DRUCK | PRESSION ACCUMULATEUR PISTON | N2 PRESSURE (BACK HEAD)

bar 14-17

psi 203-247

AKKUMULATORDRUCK | ACCUMULATOR DRUCK | PRESSION ACCUMULATEUR | N2 PRESSURE (ACCUMULATOR)

bar /

psi /

SCHALL 85DB(A)-ENTFERNUNG | GELUID 85DB(A)-AFSTAND | BRUIT 85DB(A)-DISTANCE | NOISE 85DB(A)-DISTANCE

m 5~10

BAGGERGRÖSSE | GRAAFMACHINE KLASSE | EXCAVATRICE APPLICABLE | APPLICABLE EXCAVATOR

t 4.5~6

LOCHBILD | HOLE PATTERN | GATEN PATROON | MOTIF DE TROU

AC AC-05



BEILITE®EUROPE B.V.

| Rijkssstraatweg 4, NL-4197BC Buurmalsen |

| Tel: +31 316 267291 |

| Info@beilite-europe.com |

| www.beilite-europe.com |

COPYRIGHT 2024

BEILITE®EUROPE B.V.

ALL RIGHTS RESERVED



Subject to errors and changes
Our general terms and conditions apply, published at
www.beilite-europe.com



B-BLTB-75-3-2-2024



IB
BEILITE
EUROPE

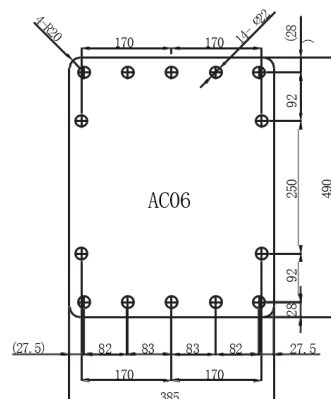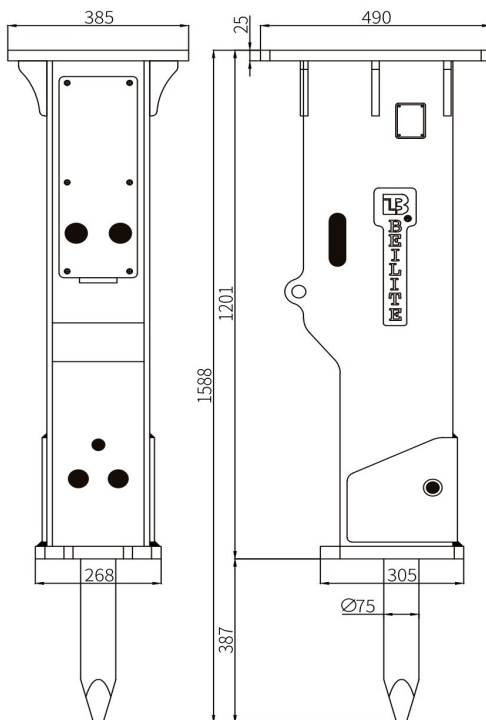

BEILITE®EUROPE B.V.
 | Rijksweg 4, NL-4197BC Buurmalsen |
 | Tel: +31 316 267291 |
 | Info@beilite-europe.com |
 | www.beilite-europe.com |

Subject to errors and changes
Our general terms and conditions apply, published at
www.beillite-europe.com




**HYDRAULIKHAMMER | HYDRAULISCHE HAMER
MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER**



B[®]LUBE Standard

Deutsch Nederlands Francais English			
GESAMTGEWICHT WERKGEWICHT POIS EN ORDRE DE MARCHÉ WORKING WEIGHT	kg	666	
	lb	1468	
GESAMTLÄNGE LENGTE LONGUEUR TOTALE TOTAL LENGTH	mm	1839	
	inch	84,3	
ÖLFLUSS OLIESTROOM DÉBIT D'HUILE WORKING OIL FLOW	l/min	60~100	
	gal/min	15.9~26.4	
BAGGER-EINSTELLDRUCK STEL DRUK GRAAFMACHINE PRESSION DE RÉGLAGE DE L'EXCAVATEUR SET PRESSURE EXCAVATOR	bar	180	
	psi	2611	
BETRIEBSDRUCK WERKDRUK PRESSION DE FONCTIONNEMENT OPERATING PRESSURE	bar	130~160	
	psi	1885~2321	
SCHLAGFREQUENZ SLAGFREQUENTIE FRÉQUENCE D'IMPACT IMPACT RATE	bpm	400~800	
	mm	85	
WERKZEUGDURCHMESSER BEITEL DIAMETER DIAMÈTRE DU BURIN CHISEL DIAMETER	inch	3,3	
	mm	850	
WERKZEUGLÄNGE BEITEL LENGTE LONGUEUR DU BURIN CHISEL LENGTH	inch	33,5	
	inch	¾	
SCHLAUCHANSCHLUSS SLANG AANSLUITING DIAMÈTRE DU TUYAU HOSE DIAMETER	bar	14-17	
	psi	203-247	
KOLBENSPEICHERDRUCK ZUIGERACCUMULATOR DRUCK PRESSION ACCUMULATEUR PISTON N2 PRESSURE (BACK HEAD)	bar	/	
	psi	/	
AKKUMULATORDRUCK ACCUMULATOR DRUCK PRESSION ACCUMULATEUR N2 PRESSURE (ACCUMULATOR)	m	6~12	
SCHALL 85DB(A)-ENTFERNUNG GELUID 85DB(A)-AFSTAND BRUIT 85DB(A)-DISTANCE NOISE 85DB(A)-DISTANCE	t	7~11	
BAGGERGRÖSSE GRAAFMACHINE KLASSE EXCAVATRICE APPLICABLE APPLICABLE EXCAVATOR	AC	AC-06	
LOCHBILD HOLE PATTERN GATEN PATROON MOTIF DE TROU			





Subject to errors and changes
Our general terms and conditions apply, published at
www.beillite-europe.com



BLTB-100A-3

HYDRAULIKHAMMER | HYDRAULISCHE HAMER
MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

B-BLTB-100A-3-2-2024

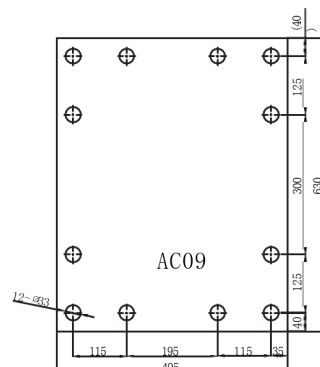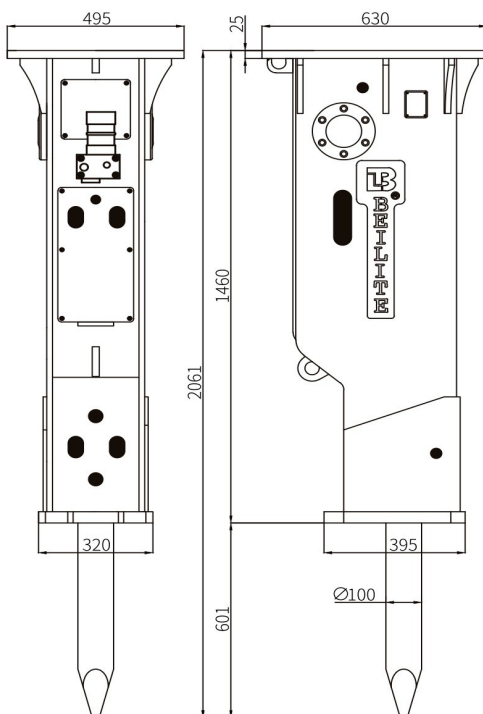

B®LUBE Standard

Deutsch | Nederlands | Français | Englisch

	kg	986
GESAMTGEWICHT WERKGEWICHT POIS EN ORDRE DE MARCHÉ WORKING WEIGHT	lb	2174
	mm	2061
GESAMTLÄNGE LENGTE LONGUEUR TOTALE TOTAL LENGTH	inch	90,9
	l/min	80~110
ÖLFLUSS OLIESTROOM DÉBIT D'HUILE WORKING OIL FLOW	gal/min	21.1~29.1
BAGGER-EINSTELLDROCK STEL DRUK GRAAFMACHINE PRESSIÖN DE RÉGLAGE DE L'EXCAVATEUR SET PRESSURE EXCAVATOR	bar	210
	psi	3046
BETRIEBSDRUCK WERKDRUK PRESSIÖN DE FONCTIONNEMENT OPERATING PRESSURE	bar	150~170
	psi	2176~2466
SCHLAGFREQUENZ SLAGFREQUENTIE FRÉQUENZ D'IMPACT IMPACT RATE	bpm	350~700
WERKZEUGDURCHMESSER BEITEL DIAMETER DIAMÈTRE DU BURIN CHISEL DIAMETER	mm	100
	inch	3,9
WERKZEUGLÄNGE BEITEL LENGTE LONGUEUR DU BURIN CHISEL LENGTH	mm	1000
	inch	39,4
SCHLAUCHANSCHLUSS SLAG AANSLUITING DIAMÈTRE DU TUYAU HOSE DIAMETER	inch	¾
KOLBENSPEICHERDRUCK ZUIGERACCUMULATOR DRUCK PRESSIÖN ACCUMULATEUR PISTON N2 PRESSURE (BACK HEAD)	bar	14-17
	psi	203-247
AKKUMULATORDRUCK ACCUMULATOR DRUCK PRESSIÖN ACCUMULATEUR N2 PRESSURE (ACCUMULATOR)	bar	55-60
	psi	798-870
SCHALL 85DB(A)-ENTFERNUNG GELUID 85DB(A)-AFSTAND BRUIT 85DB(A)-DISTANCE NOISE 85DB(A)-DISTANCE	m	7~14
BAGGERGRÖSSE GRAAFMACHINE KLASSE EXCAVATRICE APPLICABLE APPLICABLE EXCAVATOR	t	10~16
LOCHBILD HOLE PATTERN GATEN PATROON MOTIF DE TROU	AC	AC-09



BEILITE®EUROPE B.V.

| Rijkssstraatweg 4, NL-4197BC Buurmalsen |

| Tel: +31 316 267291 |

| Info@beilite-europe.com |

| www.beilite-europe.com |

COPYRIGHT 2024



BEILITE®EUROPE B.V.

ALL RIGHTS RESERVED

Subject to errors and changes
Our general terms and conditions apply, published at
www.beilite-europe.com



R-BI TR-125A-3-2-2024

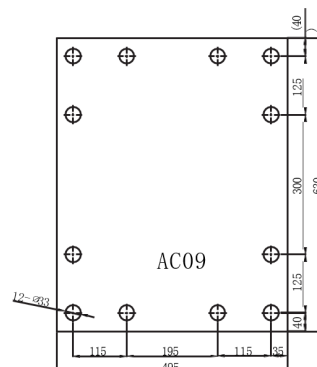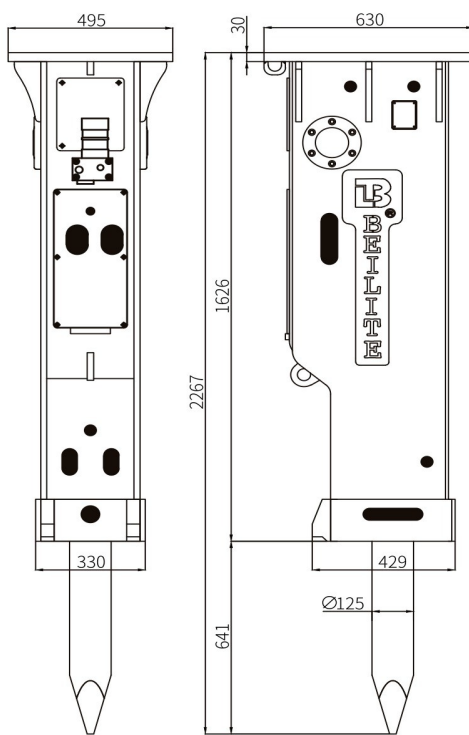

kg	1357
lb	2992
mm	2267
inch	102,7
l/min	90~120
gal/min	23.8~31.
bar	210
psi	3046
bar	150~170
psi	2176~246
bpm	350~650
mm	125
inch	4,9
mm	1100
inch	43,3
inch	1
bar	14-17
psi	203-247
bar	55-60
psi	798-870
m	10~18
t	14~20
AC	AC-09






Subject to errors and changes
Our general terms and conditions apply, published at
www.beillite-europe.com



BLTB-135A-3

HYDRAULIKHAMMER | HYDRAULISCHE HAMER
MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

B-BLTB-135A-3-2-2024

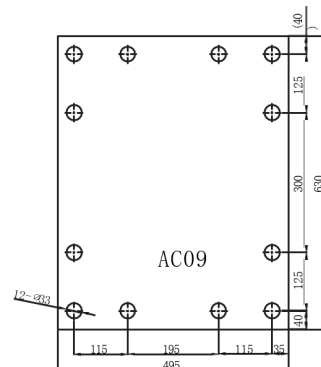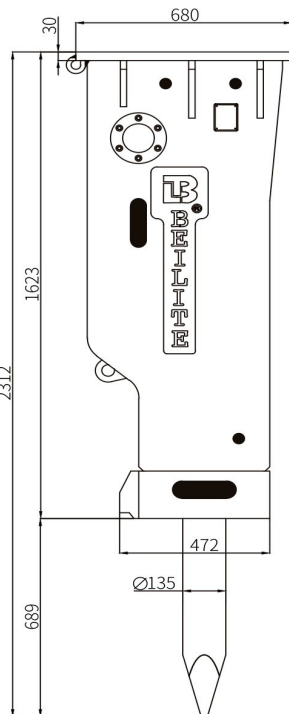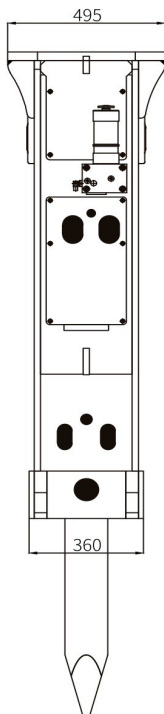

B[®]LUBE Standard

Deutsch | Nederlands | Français | Englisch

GESAMTGEWICHT | WERKGEWICHT | POIS EN ORDRE DE MARCHÉ | WORKING WEIGHT

kg 1736

lb 3827

GESAMTLÄNGE | LENGTE | LONGUEUR TOTALE | TOTAL LENGTH

mm 2312

inch 106,5

ÖLFLUSS | OLIESTROOM | DÉBIT D'HUILE | WORKING OIL FLOW

l/min 120-180

gal/min 31,7-47,6

BAGGER-EINSTELLD RUCK | STEL DRUK GRAAFMACHINE | PRESSION DE RÉGLAGE DE L'EXCAVATEUR | SET PRESSURE EXCAVATOR

bar 210

psi 3046

BETRIEBSDRUCK | WERKDRUK | PRESSION DE FONCTIONNEMENT | OPERATING PRESSURE

bar 160-180

psi 2321-2611

SCHLAGFREQUENZ | SLAGFREQUENTIE | FRÉQUENCE D'IMPACT | IMPACT RATE

bpm 350-500

WERKZEUGDURCHMESSER | BEITEL DIAMETER | DIAMÈTRE DU BURIN | CHISEL DIAMETER

mm 135

inch 5,3

WERKZEUGLÄNGE | BEITEL LENGTE | LONGUEUR DU BURIN | CHISEL LENGTH

mm 1200

inch 47,2

SCHLAUCHANSCHLUSS | SLAG AANSLUITING | DIAMÈTRE DU TUYAU | HOSE DIAMETER

inch 1

KOLBENSPEICHERDRUCK | ZUIGERACCUMULATOR DRUCK | PRESSION ACCUMULATEUR PISTON | N2 PRESSURE (BACK HEAD)

bar 14-17

psi 203-247

AKKUMULATORDRUCK | ACCUMULATOR DRUCK | PRESSION ACCUMULATEUR | N2 PRESSURE (ACCUMULATOR)

bar 55-60

psi 798-870

SCHALL 85DB(A)-ENTFERNUNG | GELUID 85DB(A)-AFSTAND | BRUIT 85DB(A)-DISTANCE | NOISE 85DB(A)-DISTANCE

m 16-22

BAGGERGRÖSSE | GRAAFMACHINE KLASSE | EXCAVATRICE APPLICABLE | APPLICABLE EXCAVATOR

t 18-25

LOCHBILD | HOLE PATTERN | GATEN PATROON | MOTIF DE TROU

AC AC-09



BEILITE®EUROPE B.V.

| Rijkssstraatweg 4, NL-4197BC Buurmalsen |

| Tel: +31 316 267291 |

| Info@beilite-europe.com |

| www.beilite-europe.com |

COPYRIGHT 2024

BEILITE®EUROPE B.V.

ALL RIGHTS RESERVED

Subject to errors and changes
Our general terms and conditions apply, published at
www.beilite-europe.com



Subject to errors and changes
Our general terms and conditions apply, published at
www.beillite-europe.com



BLTB-150-3

HYDRAULIKHAMMER | HYDRAULISCHE HAMER
MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

B-BLTB-150-3-2-2024

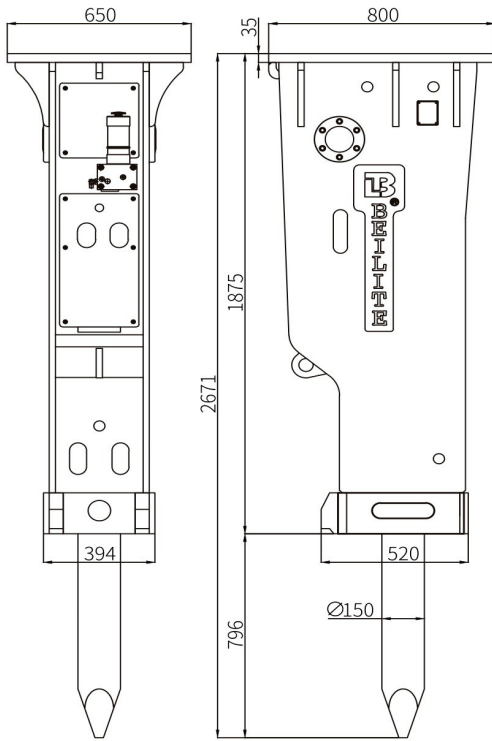

B[®]LUBE Standard

Deutsch | Nederlands | Français | Englisch

GESAMTGEWICHT | WERKGEWICHT | POIS EN ORDRE DE MARCHÉ | WORKING WEIGHT

kg 2318

lb 5110

GESAMTLÄNGE | LENGTE | LONGUEUR TOTALE | TOTAL LENGTH

mm 2671

inch 123,1

ÖLFLUSS | OLIESTROOM | DÉBIT D'HUILE | WORKING OIL FLOW

l/min 150-210

gal/min 39,6-55,5

BAGGER-EINSTELLDRUCK | STEL DRUK GRAAFMACHINE | PRESSION DE RÉGLAGE DE L'EXCAVATEUR | SET PRESSURE EXCAVATOR

bar 230

psi 3336

BETRIEBSDRUCK | WERKDRUK | PRESSION DE FONCTIONNEMENT | OPERATING PRESSURE

bar 180-200

psi 2611-2901

SCHLAGFREQUENZ | SLAGFREQUENTIE | FRÉQUENCE D'IMPACT | IMPACT RATE

bpm 200-300

WERKZEUGDURCHMESSER | BEITEL DIAMETER | DIAMÈTRE DU BURIN | CHISEL DIAMETER

mm 150

inch 5,9

WERKZEUGLÄNGE | BEITEL LENGTE | LONGUEUR DU BURIN | CHISEL LENGTH

mm 1400

inch 55,1

SCHLAUCHANSCHLUSS | SLAG AANSLUITING | DIAMÈTRE DU TUYAU | HOSE DIAMETER

inch 1 1/4

KOLBENSPEICHERDRUCK | ZUIGERACCUMULATOR DRUCK | PRESSION ACCUMULATEUR PISTON | N2 PRESSURE (BACK HEAD)

bar 17-20

psi 247-290

AKKUMULATORDRUCK | ACCUMULATOR DRUCK | PRESSION ACCUMULATEUR | N2 PRESSURE (ACCUMULATOR)

bar 55-60

psi 798-870

SCHALL 85DB(A)-ENTFERNUNG | GELUID 85DB(A)-AFSTAND | BRUIT 85DB(A)-DISTANCE | NOISE 85DB(A)-DISTANCE

m 21-30

BAGGERGRÖSSE | GRAAFMACHINE KLASSE | EXCAVATRICE APPLICABLE | APPLICABLE EXCAVATOR

t 24-27

LOCHBILD | HOLE PATTERN | GATEN PATROON | MOTIF DE TROU

AC AC-10



BEILITE®EUROPE B.V.

| Rijksstraatweg 4, NL-4197BC Buurmalsen |

| Tel: +31 316 267291 |

| Info@beilite-europe.com |

| www.beilite-europe.com |

COPYRIGHT 2024

BEILITE®EUROPE B.V.

ALL RIGHTS RESERVED



Subject to errors and changes
Our general terms and conditions apply, published at
www.beilite-europe.com



BLTB-155-3

HYDRAULIKHAMMER | HYDRAULISCHE HAMER
MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

B-BLTB-155-3-2-2024

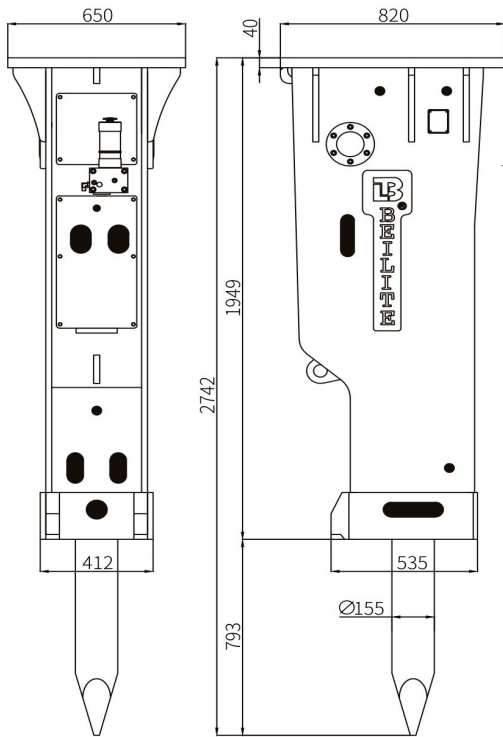

B®LUBE Standard

Deutsch | Nederlands | Français | Englisch

GESAMTGEWICHT WERKGEWICHT POIS EN ORDRE DE MARCHÉ WORKING WEIGHT	kg	2610
	lb	5754
GESAMTLÄNGE LENGTE LONGUEUR TOTALE TOTAL LENGTH	mm	2742
	inch	124,4
ÖLFLUSS OLIESTROOM DÉBIT D'HUILE WORKING OIL FLOW	l/min	180-240
	gal/min	47.6-63.4
BAGGER-EINSTELLDROCK STEL DRUK GRAAFMACHINE PRESSION DE RÉGLAGE DE L'EXCAVATEUR SET PRESSURE EXCAVATOR	bar	250
	psi	3626
BETRIEBSDRUCK WERKDRUK PRESSION DE FONCTIONNEMENT OPERATING PRESSURE	bar	200-220
	psi	2901-3191
SCHLAFREQUENZ SLAGFREQUENTIE FRÉQUENCE D'IMPACT IMPACT RATE	bpm	200-300
	mm	155
WERKZEUGDURCHMESSER BEITEL DIAMETER DIAMÈTRE DU BURIN CHISEL DIAMETER	inch	6,1
	mm	1400
WERKZEUGLÄNGE BEITEL LENGTE LONGUEUR DU BURIN CHISEL LENGTH	inch	55,1
	inch	1 1/4
SCHLAUCHANSCHLUSS SLAG AANSLUITING DIAMÈTRE DU TUYAU HOSE DIAMETER	bar	17-20
	psi	247-290
KOLBENSPEICHERDRUCK ZUIGERACCUMULATOR DRUCK PRESSION ACCUMULATEUR PISTON N2 PRESSURE (BACK HEAD)	bar	55-60
	psi	798-870
AKKUMULATORDRUCK ACCUMULATOR DRUCK PRESSION ACCUMULATEUR N2 PRESSURE (ACCUMULATOR)	m	26-35
	t	33-38
SCHALL 85DB(A)-ENTFERNUNG GELUID 85DB(A)-AFSTAND BRUIT 85DB(A)-DISTANCE NOISE 85DB(A)-DISTANCE	AC	AC-10
BAGGERGRÖSSE GRAAFMACHINE KLASSE EXCAVATRICE APPLICABLE APPLICABLE EXCAVATOR		
LOCHBILD HOLE PATTERN GATEN PATROON MOTIF DE TROU		



BEILITE®EUROPE B.V.

| Rijkssstraatweg 4, NL-4197BC Buurmalsen |

| Tel: +31 316 267291 |

| Info@beilite-europe.com |

| www.beilite-europe.com |

COPYRIGHT 2024

BEILITE®EUROPE B.V.

ALL RIGHTS RESERVED



Subject to errors and changes
Our general terms and conditions apply, published at
www.beilite-europe.com



BLTB-165-3

HYDRAULIKHAMMER | HYDRAULISCHE HAMER
MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

B-BLTB-165-3-2-2024

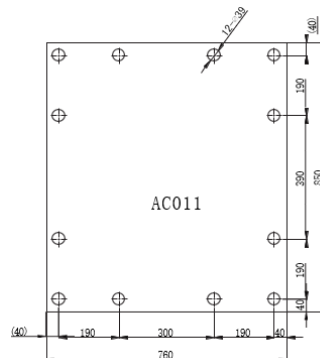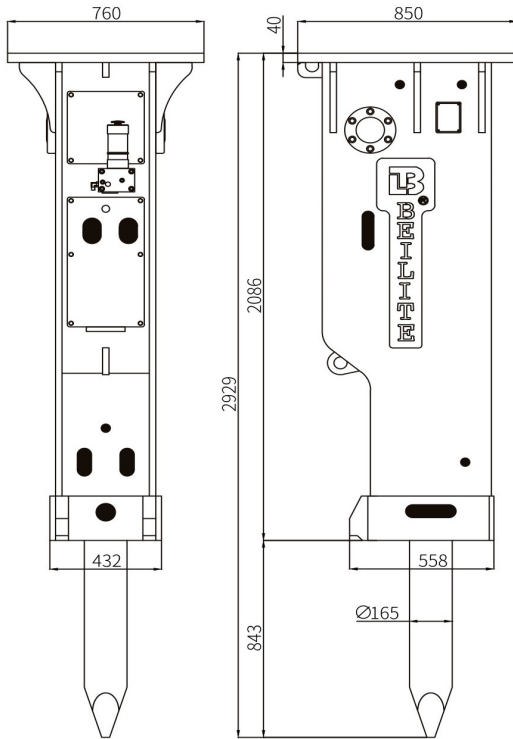

B[®]LUBE Standard

Deutsch | Nederlands | Français | Englisch

GESAMTGEWICHT | WERKGEWICHT | POIS EN ORDRE DE MARCHÉ | WORKING WEIGHT

kg 3149

lb 6942

GESAMTLÄNGE | LENGTE | LONGUEUR TOTALE | TOTAL LENGTH

mm 2929

inch 132,6

ÖLFLUSS | OLIESTROOM | DÉBIT D'HUILE | WORKING OIL FLOW

l/min 200-260

gal/min 52,8-68,7

BAGGER-EINSTELLD RUCK | STEL DRUK GRAAFMACHINE | PRESSION DE RÉGLAGE DE L'EXCAVATEUR | SET PRESSURE EXCAVATOR

bar 260

psi 3771

BETRIEBSDRUCK | WERKDRUK | PRESSION DE FONCTIONNEMENT | OPERATING PRESSURE

bar 210-230

psi 3046-3336

SCHLAGFREQUENZ | SLAGFREQUENTIE | FRÉQUENCE D'IMPACT | IMPACT RATE

bpm 150-300

WERKZEUGDURCHMESSER | BEITEL DIAMETER | DIAMÈTRE DU BURIN | CHISEL DIAMETER

mm 165

inch 6,5

WERKZEUGLÄNGE | BEITEL LENGTE | LONGUEUR DU BURIN | CHISEL LENGTH

mm 1450

inch 57,1

SCHLAUCHANSCHLUSS | SLAG AANSLUITING | DIAMÈTRE DU TUYAU | HOSE DIAMETER

inch 1 1/4

KOLBENSPEICHERDRUCK | ZUIGERACCUMULATOR DRUCK | PRESSION ACCUMULATEUR PISTON | N2 PRESSURE (BACK HEAD)

bar 18-22

psi 261-319

AKKUMULATORDRUCK | ACCUMULATOR DRUCK | PRESSION ACCUMULATEUR | N2 PRESSURE (ACCUMULATOR)

bar 55-60

psi 798-870

SCHALL 85DB(A)-ENTFERNUNG | GELUID 85DB(A)-AFSTAND | BRUIT 85DB(A)-DISTANCE | NOISE 85DB(A)-DISTANCE

m 35-40

BAGGERGRÖSSE | GRAAFMACHINE KLASSE | EXCAVATRICE APPLICABLE | APPLICABLE EXCAVATOR

t 33-38

LOCHBILD | HOLE PATTERN | GATEN PATROON | MOTIF DE TROU

AC AC-11



BEILITE@EUROPE B.V.

| Rijkssstraatweg 4, NL-4197BC Buurmalsen |

| Tel: +31 316 267291 |

| Info@beilite-europe.com |

| www.beilite-europe.com |

COPYRIGHT 2024

BEILITE@EUROPE B.V.

ALL RIGHTS RESERVED


Subject to errors and changes
Our general terms and conditions apply, published at
www.beilite-europe.com



BLTB-175L-3

HYDRAULIKHAMMER | HYDRAULISCHE HAMER
MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

B-BLTB-175L-3-2-2024

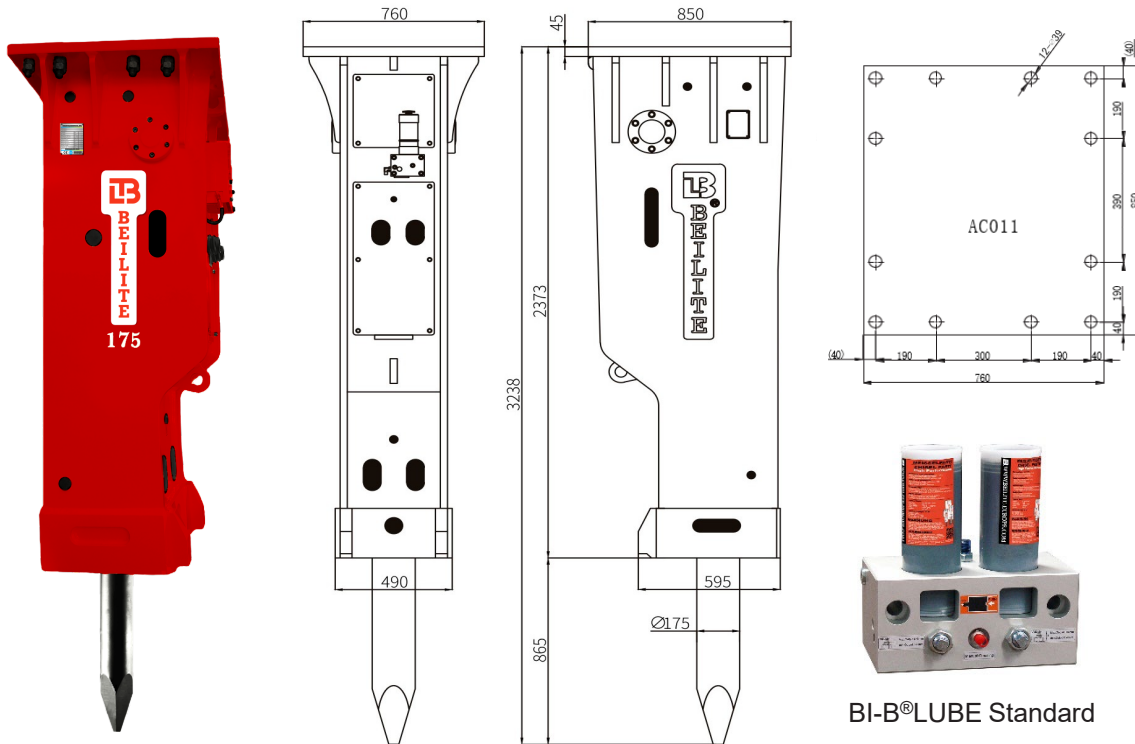

BI-B®LUBE Standard

Deutsch | Nederlands | Français | English

GESAMTGEWICHT WERKGEWICHT POIS EN ORDRE DE MARCHÉ WORKING WEIGHT	kg	4575
	lb	10086
GESAMTLÄNGE LENGTE LONGUEUR TOTALE TOTAL LENGTH	mm	3238
	inch	145.0
ÖLFLUSS OLIESTROOM DÉBIT D'HUILE WORKING OIL FLOW	l/min	220-270
	gal/min	58.1-71.3
BAGGER-EINSTELLDROCK STEL DRUK GRAAFMACHINE PRESSIÖN DE RÉGLAGE DE L'EXCAVATEUR SET PRESSURE EXCAVATOR	bar	280
	psi	4061
BETRIEBSDRUCK WERKDRUK PRESSIÖN DE FONCTIONNEMENT OPERATING PRESSURE	bar	230-250
	psi	3336-3626
SCHLAGFREQUENZ SLAGFREQUENTIE FRÉQUENCE D'IMPACT IMPACT RATE	bpm	130-200
WERKZEUGDURCHMESSER BEITEL DIAMETER DIAMÈTRE DU BURIN CHISEL DIAMETER	mm	175
	inch	6,9
WERKZEUGLÄNGE BEITEL LENGTE LONGUEUR DU BURIN CHISEL LENGTH	mm	1500
	inch	59,1
SCHLAUCHANSCHLUSS SLANG AANSLUITING DIAMÈTRE DU TUYAU HOSE DIAMETER	inch	1 1/4
KOLBENSPEICHERDRUCK ZUIGERACCUMULATOR DRUCK PRESSIÖN ACCUMULATEUR PISTON N2 PRESSURE (BACK HEAD)	bar	25-28
	psi	363-406
AKKUMULATORDRUCK ACCUMULATOR DRUCK PRESSIÖN ACCUMULATEUR N2 PRESSURE (ACCUMULATOR)	bar	55-60
	psi	798-870
SCHALL 85DB(A)-ENTFERNUNG GELUID 85DB(A)-AFSTAND BRUIT 85DB(A)-DISTANCE NOISE 85DB(A)-DISTANCE	m	38-45
BAGGERGRÖSSE GRAAFMACHINE KLASSE EXCAVATRICE APPLICABLE APPLICABLE EXCAVATOR	t	40-50
LOCHBILD HOLE PATTERN GATEN PATROON MOTIF DE TROU	AC	AC-11



BEILITE®EUROPE B.V.

| Rijkssstraatweg 4, NL-4197BC Buurmalsen |

| Tel: +31 316 267291 |

| Info@beilite-europe.com |

| www.beilite-europe.com |

COPYRIGHT 2024

BEILITE®EUROPE B.V.

ALL RIGHTS RESERVED




Subject to errors and changes
Our general terms and conditions apply, published at
www.beilite-europe.com



BLTB-190-3-W

HYDRAULIKHAMMER | HYDRAULISCHE HAMER
MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

B-BLTB-190-3-W-2-2024

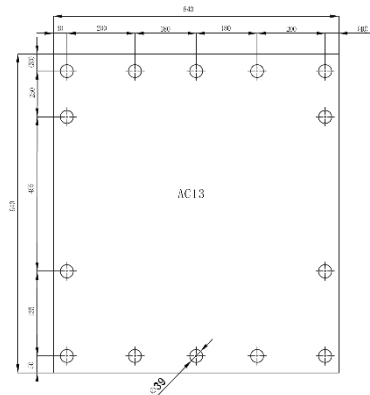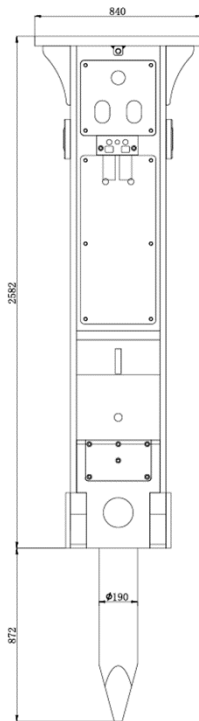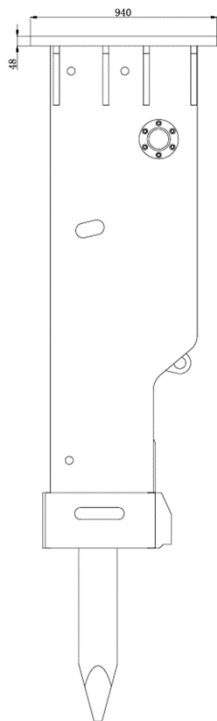

BI-B®LUBE Standard

Deutsch | Nederlands | Français | English

GESAMTGEWICHT | WERKGEWICHT | POIS EN ORDRE DE MARCHÉ | WORKING WEIGHT

kg 4700

lb 10361

GESAMTLÄNGE | LENGTE | LONGUEUR TOTALE | TOTAL LENGTH

mm 3334

inch 131.3

ÖLFLUSS | OLIESTROOM | DÉBIT D'HUILE | WORKING OIL FLOW

l/min 240-290

gal/min 63.4-76.6

BAGGER-EINSTELLD RUCK | STEL DRUK GRAAFMACHINE | PRESSION DE RÉGLAGE DE L'EXCAVATEUR | SET PRESSURE EXCAVATOR

bar 300

psi 4351

BETRIEBSDRUCK | WERKDRUK | PRESSION DE FONCTIONNEMENT | OPERATING PRESSURE

bar 250-270

psi 3626-3916

SCHLAGFREQUENZ | SLAGFREQUENTIE | FRÉQUENCE D'IMPACT | IMPACT RATE

bpm 100-140

WERKZEUGDURCHMESSER | BEITEL DIAMETER | DIAMÈTRE DU BURIN | CHISEL DIAMETER

mm 190

inch 7.5

WERKZEUGLÄNGE | BEITEL LENGTE | LONGUEUR DU BURIN | CHISEL LENGTH

mm 1600

inch 62

SCHLAUCHANSCHLUSS | SLAG AANSLUITING | DIAMÈTRE DU TUYAU | HOSE DIAMETER

inch 1 1/4

KOLBENSPEICHERDRUCK | ZUIGERACCUMULATOR DRUCK | PRESSION ACCUMULATEUR PISTON | N2 PRESSURE (BACK HEAD)

bar 27-30

psi 391.6-435.1

AKKUMULATORDRUCK | ACCUMULATOR DRUCK | PRESSION ACCUMULATEUR | N2 PRESSURE (ACCUMULATOR)

bar 65-70

psi 942.7-1015.3

SCHALL 85DB(A)-ENTFERNUNG | GELUID 85DB(A)-AFSTAND | BRUIT 85DB(A)-DISTANCE | NOISE 85DB(A)-DISTANCE

m 45-50

BAGGERGRÖSSE | GRAAFMACHINE KLASSE | EXCAVATRICE APPLICABLE | APPLICABLE EXCAVATOR

t 45-55

LOCHBILD | HOLE PATTERN | GATEN PATROON | MOTIF DE TROU

AC AC-13



BEILITE®EUROPE B.V.

| Rijkssstraatweg 4, NL-4197BC Buurmalsen |

| Tel: +31 316 267291 |

| Info@beilite-europe.com |

| www.beilite-europe.com |

COPYRIGHT 2024

BEILITE®EUROPE B.V.

ALL RIGHTS RESERVED




Subject to errors and changes
Our general terms and conditions apply, published at
www.beilite-europe.com



BLTB-195-3-W

HYDRAULIKHAMMER | HYDRAULISCHE HAMER
MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

B-BLTB-195-3-W-2-2024

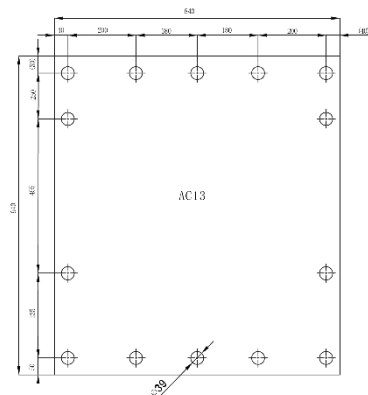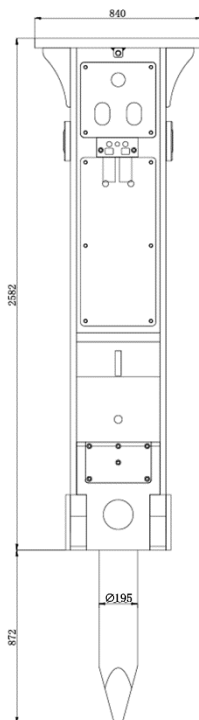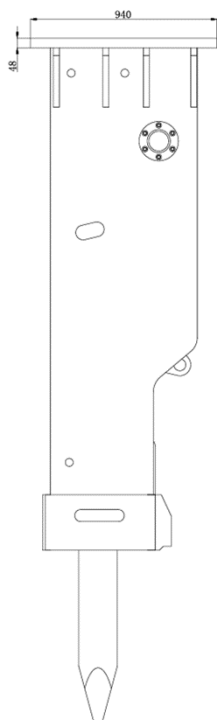

BI-B®LUBE Standard

Deutsch | Nederlands | Français | English

GESAMTGEWICHT | WERKGEWICHT | POIS EN ORDRE DE MARCHÉ | WORKING WEIGHT

kg 4900
lb 10802

GESAMTLÄNGE | LENGTE | LONGUEUR TOTALE | TOTAL LENGTH

mm 3454
inch 136

ÖLFLUSS | OLIESTROOM | DÉBIT D'HUILE | WORKING OIL FLOW

l/min 260-310
gal/min 68.7-81.9

BAGGER-EINSTELLDROCK | STEL DRUK GRAAFMACHINE | PRESSION DE RÉGLAGE DE L'EXCAVATEUR | SET PRESSURE EXCAVATOR

bar 310
psi 4496

BETRIEBSDRUCK | WERKDRUK | PRESSION DE FONCTIONNEMENT | OPERATING PRESSURE

bar 260-280
psi 3771-4061

SCHLAGFREQUENZ | SLAGFREQUENTIE | FRÉQUENCE D'IMPACT | IMPACT RATE

bpm 100-140

WERKZEUGDURCHMESSER | BEITEL DIAMETER | DIAMÈTRE DU BURIN | CHISEL DIAMETER

mm 195
inch 7.7

WERKZEUGLÄNGE | BEITEL LENGTE | LONGUEUR DU BURIN | CHISEL LENGTH

mm 1600
inch 62

SCHLAUCHANSCHLUSS | SLAG AANSLUITING | DIAMÈTRE DU TUYAU | HOSE DIAMETER

inch 1 1/4

KOLBENSPEICHERDRUCK | ZUIGERACCUMULATOR DRUCK | PRESSION ACCUMULATEUR PISTON | N2 PRESSURE (BACK HEAD)

bar 30-33
psi 435.1-478.6

AKKUMULATORDRUCK | ACCUMULATOR DRUCK | PRESSION ACCUMULATEUR | N2 PRESSURE (ACCUMULATOR)

bar 65-70
psi 942.7-1015.3

SCHALL 85DB(A)-ENTFERNUNG | GELUID 85DB(A)-AFSTAND | BRUIT 85DB(A)-DISTANCE | NOISE 85DB(A)-DISTANCE

m 48-52

BAGGERGRÖSSE | GRAAFMACHINE KLASSE | EXCAVATRICE APPLICABLE | APPLICABLE EXCAVATOR

t 50-60

LOCHBILD | HOLE PATTERN | GATEN PATROON | MOTIF DE TROU

AC AC-13



BEILITE®EUROPE B.V.

| Rijkssstraatweg 4, NL-4197BC Buurmalsen |

| Tel: +31 316 267291 |

| Info@beilite-europe.com |

| www.beilite-europe.com |

COPYRIGHT 2024

BEILITE®EUROPE B.V.

ALL RIGHTS RESERVED




Subject to errors and changes
Our general terms and conditions apply, published at
www.beilite-europe.com



BLTB-200-3-W

HYDRAULIKHAMMER | HYDRAULISCHE HAMER
MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

B-BLTB-200-3-W-2-2024

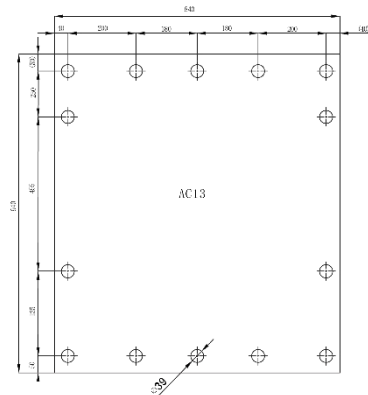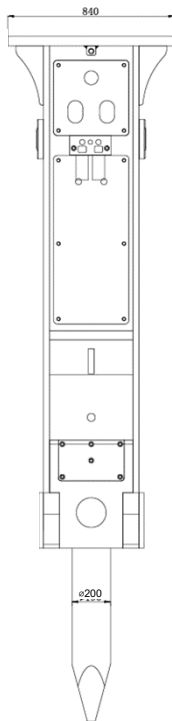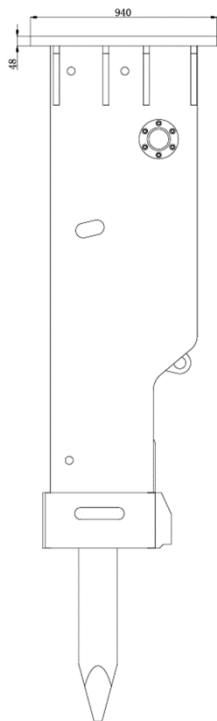

BI-B®LUBE Standard

Deutsch | Nederlands | Français | English

GESAMTGEWICHT WERKGEWICHT POIS EN ORDRE DE MARCHÉ WORKING WEIGHT	kg	5200
	lb	11464
GESAMTLÄNGE LENGTE LONGUEUR TOTALE TOTAL LENGTH	mm	3555
	inch	140
ÖLFLUSS OLIESTROOM DÉBIT D'HUILE WORKING OIL FLOW	l/min	280~330
	gal/min	73.9~87.2
BAGGER-EINSTELLDROCK STEL DRUK GRAAFMACHINE PRESSIÖN DE RÉGLAGE DE L'EXCAVATEUR SET PRESSURE EXCAVATOR	bar	330
	psi	4786
BETRIEBSDRUCK WERKDRUK PRESSIÖN DE FONCTIONNEMENT OPERATING PRESSURE	bar	280~300
	psi	4061~4351
SCHLAGFREQUENZ SLAGFREQUENTIE FRÉQUÉNCIE D'IMPACT IMPACT RATE	bpm	100~130
WERKZEUGDURCHMESSER BEITEL DIAMETER DIAMÈTRE DU BURIN CHISEL DIAMETER	mm	200
	inch	7.9
WERKZEUGLÄNGE BEITEL LENGTE LONGUEUR DU BURIN CHISEL LENGTH	mm	1620
	inch	63.8
SCHLAUCHANSCHLUSS SLAG AANSLUITING DIAMÈTRE DU TUYAU HOSE DIAMETER	inch	1 1/4
KOLBENSPEICHERDRUCK ZUIGERACCUMULATOR DRUCK PRESSIÖN ACCUMULATEUR PISTON N2 PRESSURE (BACK HEAD)	bar	27-30
	psi	391.6-435.1
AKKUMULATORDRUCK ACCUMULATOR DRUCK PRESSIÖN ACCUMULATEUR N2 PRESSURE (ACCUMULATOR)	bar	65-70
	psi	942.7-1015.3
SCHALL 85DB(A)-ENTFERNUNG GELUID 85DB(A)-AFSTAND BRUIT 85DB(A)-DISTANCE NOISE 85DB(A)-DISTANCE	m	50~55
BAGGERGRÖSSE GRAAFMACHINE KLASSE EXCAVATRICE APPLICABLE APPLICABLE EXCAVATOR	t	50~65
LOCHBILD HOLE PATTERN GATEN PATROON MOTIF DE TROU	AC	AC-13



BEILITE®EUROPE B.V.

| Rijkssstraatweg 4, NL-4197BC Buurmalsen |

| Tel: +31 316 267291 |

| Info@beilite-europe.com |

| www.beilite-europe.com |

COPYRIGHT 2024

BEILITE®EUROPE B.V.

ALL RIGHTS RESERVED




Subject to errors and changes
Our general terms and conditions apply, published at
www.beilite-europe.com



BLTB-210L-3-W

HYDRAULIKHAMMER | HYDRAULISCHE HAMER
MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

B-BLTB-210L-3-W-2-2024

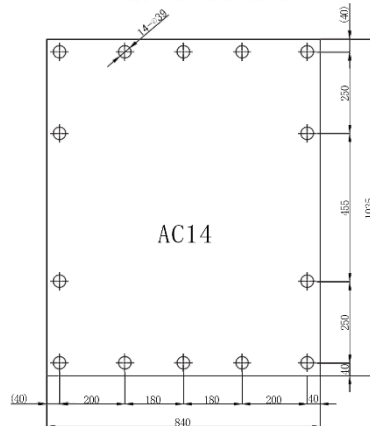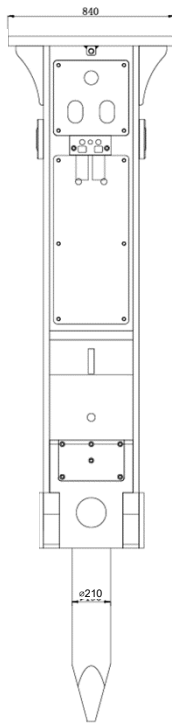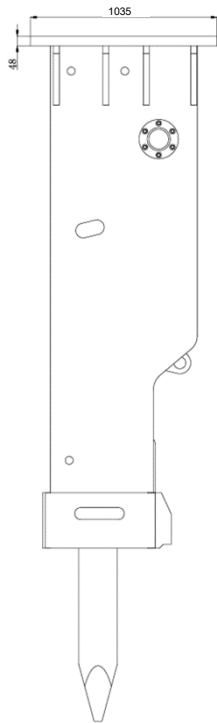

BI-B®LUBE Standard

Deutsch | Nederlands | Français | English

GESAMTGEWICHT | WERKGEWICHT | POIS EN ORDRE DE MARCHÉ | WORKING WEIGHT

kg 7000

lb 15432

GESAMTLÄNGE | LENGTE | LONGUEUR TOTALE | TOTAL LENGTH

mm 3850

inch 151.6

ÖLFLUSS | OLIESTROOM | DÉBIT D'HUILE | WORKING OIL FLOW

l/min 340-400

gal/min 89.8-105.7

BAGGER-EINSTELLD RUCK | STEL DRUK GRAAFMACHINE | PRESSION DE RÉGLAGE DE L'EXCAVATEUR | SET PRESSURE EXCAVATOR

bar 330

psi 4786

BETRIEBSDRUCK | WERKDRUK | PRESSION DE FONCTIONNEMENT | OPERATING PRESSURE

bar 280-300

psi 4061-4351

SCHLAGFREQUENZ | SLAGFREQUENTIE | FRÉQUENCE D'IMPACT | IMPACT RATE

bpm 90-120

WERKZEUGDURCHMESSER | BEITEL DIAMETER | DIAMÈTRE DU BURIN | CHISEL DIAMETER

mm 210

inch 8.3

WERKZEUGLÄNGE | BEITEL LENGTE | LONGUEUR DU BURIN | CHISEL LENGTH

mm 1800

inch 70.9

SCHLAUCHANSCHLUSS | SLAG AANSLUITING | DIAMÈTRE DU TUYAU | HOSE DIAMETER

inch 1 1/2

KOLBENSPEICHERDRUCK | ZUIGERACCUMULATOR DRUCK | PRESSION ACCUMULATEUR PISTON | N2 PRESSURE (BACK HEAD)

bar 32-35

psi 464.1-507.6

AKKUMULATORDRUCK | ACCUMULATOR DRUCK | PRESSION ACCUMULATEUR | N2 PRESSURE (ACCUMULATOR)

bar 75-80

psi 1087.8-1160.3

SCHALL 85DB(A)-ENTFERNUNG | GELUID 85DB(A)-AFSTAND | BRUIT 85DB(A)-DISTANCE | NOISE 85DB(A)-DISTANCE

m 50-55

BAGGERGRÖSSE | GRAAFMACHINE KLASSE | EXCAVATRICE APPLICABLE | APPLICABLE EXCAVATOR

t 60-75

LOCHBILD | HOLE PATTERN | GATEN PATROON | MOTIF DE TROU

AC AC-14



BEILITE®EUROPE B.V.

| Rijkssstraatweg 4, NL-4197BC Buurmalsen |

| Tel: +31 316 267291 |

| Info@beilite-europe.com |

| www.beilite-europe.com |

COPYRIGHT 2024

BEILITE®EUROPE B.V.

ALL RIGHTS RESERVED




Subject to errors and changes
Our general terms and conditions apply, published at
www.beilite-europe.com



BLTB-230-3-W

HYDRAULIKHAMMER | HYDRAULISCHE HAMER
MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

B-BLTB-230-3-W-2-2024

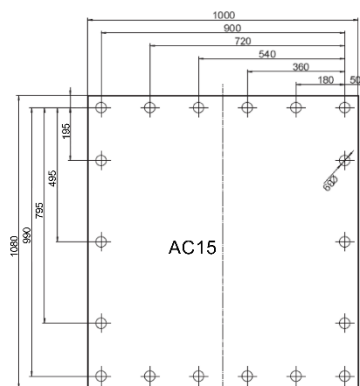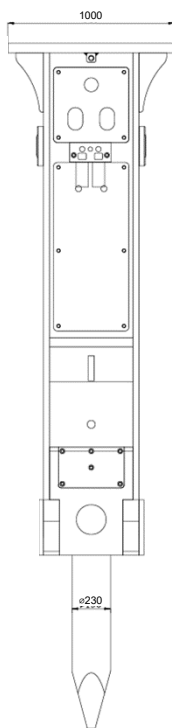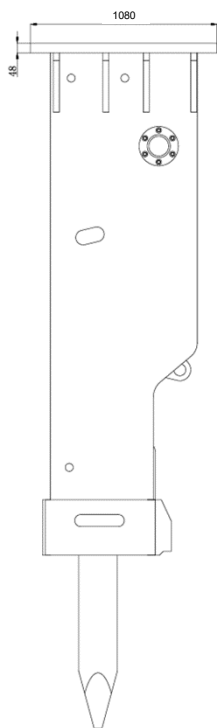

BI-B®LUBE Standard

Deutsch | Nederlands | Français | English

GESAMTGEWICHT | WERKGEWICHT | POIS EN ORDRE DE MARCHÉ | WORKING WEIGHT

kg 9000

lb 19841

GESAMTLÄNGE | LENGTE | LONGUEUR TOTALE | TOTAL LENGTH

mm 4276

inch 168.3

ÖLFLUSS | OLIESTROOM | DÉBIT D'HUILE | WORKING OIL FLOW

l/min 400-460

gal/min 105.7-121.5

BAGGER-EINSTELLDRIJK | STEL DRUK GRAAFMACHINE | PRESSION DE RÉGLAGE DE L'EXCAVATEUR | SET PRESSURE EXCAVATOR

bar 350

psi 5076

BETRIEBSDRUCK | WERKDRUK | PRESSION DE FONCTIONNEMENT | OPERATING PRESSURE

bar 300-330

psi 4351-4786

SCHLAFREQUENZ | SLAGFREQUENTIE | FRÉQUENCE D'IMPACT | IMPACT RATE

bpm 80-110

WERKZEUGDURCHMESSER | BEITEL DIAMETER | DIAMÈTRE DU BURIN | CHISEL DIAMETER

mm 230

inch 9.1

WERKZEUGLÄNGE | BEITEL LENGTE | LONGUEUR DU BURIN | CHISEL LENGTH

mm 2000

inch 78.7

SCHLAUCHANSCHLUSS | SLAG AANSLUITING | DIAMÈTRE DU TUYAU | HOSE DIAMETER

inch 1 1/2

KOLBENSPEICHERDRUCK | ZUIGERACCUMULATOR DRUCK | PRESSION ACCUMULATEUR PISTON | N2 PRESSURE (BACK HEAD)

bar 30-33

psi 435.1-478.6

AKKUMULATORDRUCK | ACCUMULATOR DRUCK | PRESSION ACCUMULATEUR | N2 PRESSURE (ACCUMULATOR)

bar 75-80

psi 1087.8-1160.3

SCHALL 85DB(A)-ENTFERNUNG | GELUID 85DB(A)-AFSTAND | BRUIT 85DB(A)-DISTANCE | NOISE 85DB(A)-DISTANCE

m 60-65

BAGGERGRÖSSE | GRAAFMACHINE KLASSE | EXCAVATRICE APPLICABLE | APPLICABLE EXCAVATOR

t 75-100

LOCHBILD | HOLE PATTERN | GATEN PATROON | MOTIF DE TROU

AC AC-15



BEILITE®EUROPE B.V.

| Rijkssstraatweg 4, NL-4197BC Buurmalsen |

| Tel: +31 316 267291 |

| Info@beilite-europe.com |

| www.beilite-europe.com |

COPYRIGHT 2024

BEILITE®EUROPE B.V.

ALL RIGHTS RESERVED




Subject to errors and changes
Our general terms and conditions apply, published at
www.beilite-europe.com



BLTB-260-3-W

HYDRAULIKHAMMER | HYDRAULISCHE HAMER
MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

B-BLTB-260-3-W-2-2024

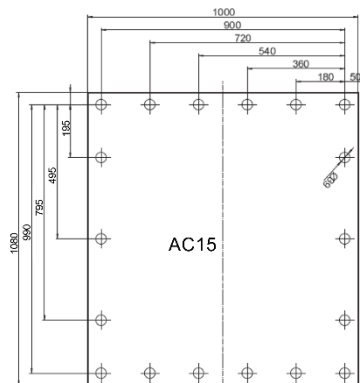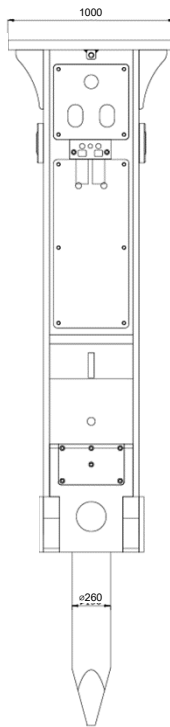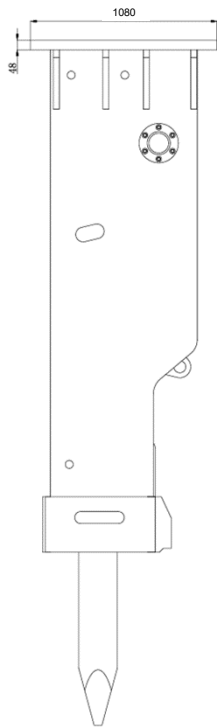

BI-B®LUBE Standard

Deutsch | Nederlands | Français | English

GESAMTGEWICHT | WERKGEWICHT | POIS EN ORDRE DE MARCHÉ | WORKING WEIGHT

kg 13000

lb 28660

GESAMTLÄNGE | LENGTE | LONGUEUR TOTALE | TOTAL LENGTH

mm 4576

inch 180.2

ÖLFLUSS | OLIESTROOM | DÉBIT D'HUILE | WORKING OIL FLOW

l/min 490-590

gal/min 129.4-155.8

BAGGER-EINSTELLDROCK | STEL DRUK GRAAFMACHINE | PRESSION DE RÉGLAGE DE L'EXCAVATEUR | SET PRESSURE EXCAVATOR

bar 350

psi 5076

BETRIEBSDRUCK | WERKDRUK | PRESSION DE FONCTIONNEMENT | OPERATING PRESSURE

bar 300-330

psi 4351-4786

SCHLAGFREQUENZ | SLAGFREQUENTIE | FRÉQUENCE D'IMPACT | IMPACT RATE

bpm 70-100

WERKZEUGDURCHMESSER | BEITEL DIAMETER | DIAMÈTRE DU BURIN | CHISEL DIAMETER

mm 260

inch 10.2

WERKZEUGLÄNGE | BEITEL LENGTE | LONGUEUR DU BURIN | CHISEL LENGTH

mm 2200

inch 86.6

SCHLAUCHANSCHLUSS | SLAG AANSLUITING | DIAMÈTRE DU TUYAU | HOSE DIAMETER

inch 1 1/2

KOLBENSPEICHERDRUCK | ZUIGERACCUMULATOR DRUCK | PRESSION ACCUMULATEUR PISTON | N2 PRESSURE (BACK HEAD)

bar 32-35

psi 464.1-507.6

AKKUMULATORDRUCK | ACCUMULATOR DRUCK | PRESSION ACCUMULATEUR | N2 PRESSURE (ACCUMULATOR)

bar 75-80

psi 1087.8-1160.3

SCHALL 85DB(A)-ENTFERNUNG | GELUID 85DB(A)-AFSTAND | BRUIT 85DB(A)-DISTANCE | NOISE 85DB(A)-DISTANCE

m 80-85

BAGGERGRÖSSE | GRAAFMACHINE KLASSE | EXCAVATRICE APPLICABLE | APPLICABLE EXCAVATOR

t 90-200

LOCHBILD | HOLE PATTERN | GATEN PATROON | MOTIF DE TROU

AC AC-15



BEILITE®EUROPE B.V.

| Rijksstraatweg 4, NL-4197BC Buurmalsen |

| Tel: +31 316 267291 |

| Info@beilite-europe.com |

| www.beilite-europe.com |

COPYRIGHT 2024

BEILITE®EUROPE B.V.

ALL RIGHTS RESERVED

Subject to errors and changes
Our general terms and conditions apply, published at
www.beilite-europe.com