





S150-Electric Skid Steer Loader

The Yuchai S150 electric skid steer loader adopts the global first wheel side motor driving, wheel side AUTO-HOLD technology and integrated chassis. It is together with features compact size, good trafficability, large operating range and comfortable driving experience, intelligent electronic control, green and environmentally friendly, low-failure rate and low-use cost. S150 supports fast charging function. By 1-hour fast charging, it can work for 8-9 hours. It can be used with a variety of attachments and can be widely used suitable for farms, forest farms, urban infrastructure, roads or construction sites, factories, and workshops, etc.



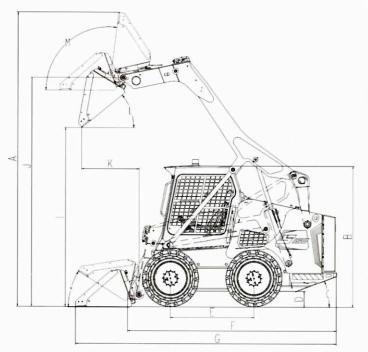



| S150-Performance Par | amete | rs | |
|----------------------------------|------------|-----------|----------------|
| Basic parameter | | | |
| Machine Weight | | 4950 | kg |
| Bucket capacity | | 0.5 | m ³ |
| Bucket width | | 1880 | mm |
| Technical Specification | | | |
| Battery | Lithium | lron Phos | phate |
| Rated power | 32/3140+4 | ×10/3140 | kW/rpn |
| Battery capacity | | 105/140 | kWh |
| Rated Operating Load | | 1620 | kg |
| Tipping Load | | 3100 | kg |
| System working pressure | 23 | (0~+0.5) | MPa |
| Flow Rate | | 87.1+51.1 | L/min |
| Increase maximum digging forc | е | 25 | kN |
| Tipping | | 24.5 | kN |
| Max. travel speed(low gear/ high | n gear) | 10/20 | km/h |
| Fast charge 1 Hour Ch | arging fro | om 30% to | o 80% |
| Endurance* | | 9-10 | h |
| Drive System | | | |

4-Wheel independent direct driving by electric motor

| g by ciecu | | |
|---|------|----|
| Operating parameter | | |
| A Overall operating height | 4280 | mm |
| B Height to top of cab | 2065 | mm |
| C Dumping angle at maximum height | 21.5 | 0 |
| D Ground clearance | 207 | mm |
| E Wheelbase | 1227 | mm |
| F Overall length without standard bucket | 3066 | mm |
| G Overall length with standard bucket | 3830 | mm |
| H Maximum angle of flat ground | 31 | 0 |
| I Unloading height | 2610 | mm |
| J Height to bucket hinge pin | 3335 | mm |
| K Loading distance at Max. unloading height | 845 | mm |
| L Dumping angle at maximum height | 41 | 0 |
| M Rollback of bucket at full height | 98 | 0 |
| N Bucket width | 1880 | mm |
| O Radius of gyration | 2179 | mm |
| P Track width | 1507 | mm |
| Q Machine width | 1832 | mm |
| | | |

^{*}According to Yuchai Equipment standard testing conditions.

Specifications are subject to change without prior notice.